

640 Acres
NORTH

15-033-20012-0000

PLUGGING RECORD

Mail To


KANSAS

OKLAHOMA CORPORATION COMMISSION

Oil and Gas Conservation Department

OKLAHOMA CITY, OKLAHOMA x Wichita, Kansas

NOTICE: All questions on this form must be satisfactorily answered.

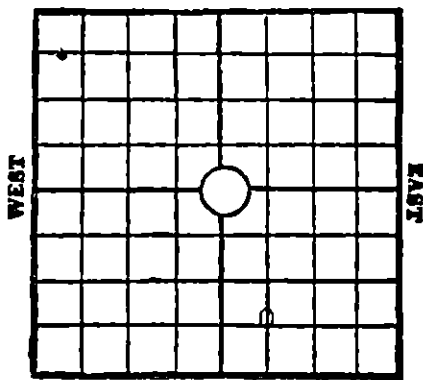

Company Operating Roy D. McAninch

Office Address 1363 First National Building

County Comanche Sec. 33 Twp. 34S Range 16W

Location in Section C $\frac{1}{4}$ SW $\frac{1}{4}$ SE $\frac{1}{4}$

Farm Name OLLER Well No. 1 Field WC

Character of Well (whether oil, gas or dry) D & A

Commenced Plugging 8-6-67 Finished 8-10-67 Total Depth 5260

Was permission obtained from the Corporation Commission or its agents before plugging was commenced... Yes

Name of Conservation Officer who supervised plugging of this well Archie Elving

Name of producing sand None Depth top _____, Bottom _____

Show depth and thickness of all fresh water, oil and gas formations.

SAND OR ZONE RECORDS

CASING RECORDS

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Mississippi	Salt Water	5212	5260	13-3/8	312	None
				5-1/2	5259	4373
PLUGGING CONTRACT: Clarke Corporation						
P. O. Box 187, Medicine Lodge, Kansas						

RECEIVED
OIL AND GAS CONSERVATION COMMISSION
AUG 18 1967
8-18-67
CONSERVATION DIVISION
WICHITA, KANSAS

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed:

Chat from 5259 to 5150; Cement 5 sacks from 5150 to 5115; Ripped pipe at 4600 and 4373;
Bailed hole down to 300; built bridge at 300; Mud from 230 to 40; Rock from 40 to 30;
Cement 25 sacks from 30 to top.

Does the above conform strictly to the oil and gas regulations? Yes

The Law requires that adjacent lease, and land-owners be notified; give their names with their addresses below:

Anadarko Production Company, Liberal, Kansas

REMARKS: Why plugged? Dry If abandoned oil or gas well, state amount and date of last production _____

Correspondence regarding this well should be addressed to Roy D. McAninch

1363 First National Building

Address Oklahoma City, Oklahoma 73102

I, the undersigned, being first duly sworn upon oath, state that this well record is true, correct and complete according to the records of this office and to the best of my knowledge and belief.

Roy D. McAninch
 Name and title of representative of company

Subscribed and sworn to before me this the 17th day of August, 19 67

Commission expires June 1, 1970

Buth a Chase
 Notary Public

DRILLER'S LOG

COMPANY: Roy D. McAninch
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: OLLER #1
 LOCATION: C SW SE SEC. 33-34S-16W
 COMANCHE COUNTY, KANSAS
 COMMENCED: 6-30-67
 COMPLETED: 7-13-67

0	775	Redbed
775	1143	Shale
1143	2000	Shale, Lime
2000	2380	Lime, Shale
2380	3050	Lime
3050	4495	Lime, Shale
4495	5080	Lime
5080	5139	Lime, Shale
5139	5260	Lime
	<u>5260</u>	<u>RTD - Set @ 5 1/2" Casing</u>

AUG 11 1967
 8-11-67
 Notary Public
 State of Kansas

Ran 13 3/8" 54# used surface casing set @ 312' cemented with 350 sacks Common, 2% cc

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Oller #1 Well, located C SW SE of Section 33, Township 34 South, Range 16 West, Comanche County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
 Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to and before me, a Notary Public, in and for Barton County, Kansas, this 15th day of July, 1967.

Ulanda Nichols
 Ulanda Nichols

My Commission Expires:
 April 1, 1971