


STATE OF KANSAS  
STATE CORPORATION COMMISSION

## WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

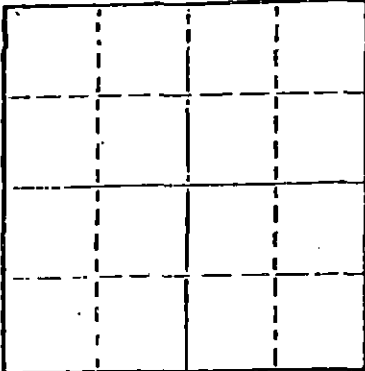

Locate well correctly on above  
Section Plat

Comanche County. Sec. 26 Twp. 33 Rge. 17 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
C SE/4

Lease Owner Mid-Continent Energy Corporation  
Lease Name Warren Well No. 1  
Office Address 712 One Twenty Building, Wichita 67202  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole

Date Well completed 3/21/79 19  
Application for plugging filed 3/21/79 19  
Application for plugging approved 3/21/79 19  
Plugging commenced 3/21/79 19  
Plugging completed 3/21/79 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen  
Producing formation Depth to top Bottom Total Depth of Well  
Show depth and thickness of all water, oil and gas formations. TD 5144'

## OIL, GAS OR WATER RECORDS

## CASING RECORD

| FORMATION | CONTENT | FROM | TO  | SIZE  | PUT IN | PULLED OUT |
|-----------|---------|------|-----|-------|--------|------------|
|           | Surface | 0    | 445 | 8-5/8 | yes    | no         |
|           |         |      |     |       |        |            |
|           |         |      |     |       |        |            |
|           |         |      |     |       |        |            |
|           |         |      |     |       |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug @ 700' with 50 sacks 50/50 Poz 6% gel

Middle plug @ 440' with 40 sacks 50/50 Poz 6% gel

Top & bridge @ 40' with 12 sacks 50/50 Poz 6% gel

3 sacks in rathole.

Job complete @ 1:10 a.m. 3/21/79

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.

James C. Remsberg (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature)

James C. Remsberg  
200 Douglas Building, Wichita, Ks. 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 2 day of April, 19 79

Mary Lou Taylor  
Mary Lou Taylor Notary Public.

My commission expires January 17, 1981



RECEIVED  
STATE CORPORATION COMMISSION

APR - 3 1979  
4-3-79  
CONSERVATION DIVISION  
Wichita, Kansas

DRILLERS LOG

OPERATOR: Mid-Continent Energy Corporation  
712 One Twenty Building  
Wichita, Kansas 67202

LEASE: Warren No.1  
C SE/4 Sec.26-33S-17W  
Comanche County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.  
200 Douglas Building  
Wichita, Kansas 67202

COMMENCED: 3/7/79

COMPLETED: 3/21/79

RTD: 5144'


SURFACE CASING: 8-5/8" set at 445' with 390 sx cement

60' to 140' Gyp & Shale & Sand  
140' to 510' Shale & Sand (450' 12½" Surface Hole)  
510' to 715' Sand & Shale  
715' to 1575' Shale (Red Bed)  
1575' to 1925' Shale  
1925' to 2175' Shale & Lime  
2175' to 2850' Lime & Shale (2850' Cotton wood)  
2850' to 3915' Lime & Shale  
3915' to 4220' Lime  
4220' to 4385' Lime & Shale  
4385' to 4450' Lime  
4450' to 4675' Lime & Shale  
4675' to 4770' Lime  
4770' to 4930' Lime & Shale  
4930' to 5035' Lime  
5035' to 5074' Miss Lime  
5074' to 5144' Mississippian  
RTD 5144'


STATE OF KANSAS

COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc. hereby  
state that the above and foregoing is an accurate copy of the Warren No. 1 log  
for Mid-Continent Energy Corporation.

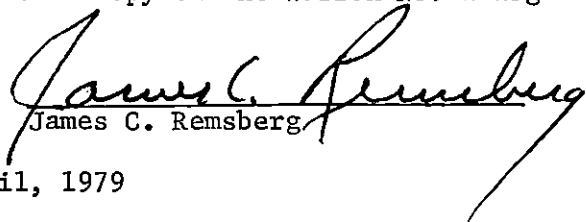  
James C. Remsberg

Subscribed and sworn to me this 2 day of April, 1979

  
Mary Lou Taylor, Notary

My commission expires January 17, 1981

