

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-20184-00-00
Spot: SENESE Sec/Twnshp/Rge: 4-30S-8W
1650 feet from S Section Line, 330 feet from E Section Line
Lease Name: BROWN A Well #: 2
County: KINGMAN Total Vertical Depth: 4355 feet

Operator License No.: 8740
Op Name: BRAMWELL PETROLEUM, INC.
Address: 12826 SW 77 AVE
ZENDA, KS 67159

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4349		150 SX
SURF	8.625	204		155 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 05/15/2014 12:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: JAMIE Company: MIKES TESTING & SALVAGE Phone: (620) 532-6019

Proposed Plugging Method: 25 SXS ON BOTTOM, 25 SXS @ 3600'. CASING LEAK 3670' - 90.

Plugging Proposal Received By: STEVE VANGIESON Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 05/27/2014 12:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

RAN 2 3/8" TUBING TO 4265 & PUMPED 25 SXS CEMENT. TAGGED CEMENT @ 4176'. PULLED TUBING TO 3307' TICKET #40144. 5-21-14 RECOVERED 1350' OF CASING. PULLED FROM WELLBORE. RAN TUBING TO 1250' SPOTTED 35 SXS CEMENT. PULLED TUBING TO 800' & SPOTTED 35 SXS CEMENT. PULLED TUBING TO 800' & SPOTTED 35 SXS CEMENT. TAGGED CEMENT AT 920' RAN TUBING BACK TO 800' & SPOTTED 35 SXS CEMENT. SD. 5-27-14 TAGGED CEMENT 612'. RAN TUBING TO 250' AND CIRCULATED CEMENT TO SURFACE WITH 100 SKS CEMENT. 28 JOINTS OF TUBING UNDER DISPLACED.

Perfs:


Top	Bot	Thru	Comments
4270	4285		

Remarks: ALLIED CEMENT COMMON CEMENT. --- DENIED TA

Plugged through: TBG

District: 02

Signed

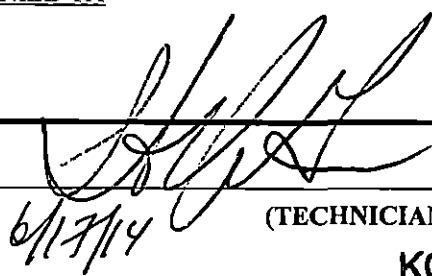

(TECHNICIAN)

KCC WICHITA

Form CP-2/3

JUN 02 2014

RECEIVED

✓