

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Comanche County. Sec. 23 Twp. 34S Rge. (E) 16 (W)
Location as "NE/CNWxSWx" or footage from lines C NE SW
Lease Owner Champlin Petroleum Co.
Lease Name Huck Well No. 2
Office Address P.O. Box 1678, Okla. City, OK 73101
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 12 19 72
Application for plugging filed April 12 19 72
Application for plugging approved April 12 19 72
Plugging commenced April 12 19 72
Plugging completed April 12 19 72
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

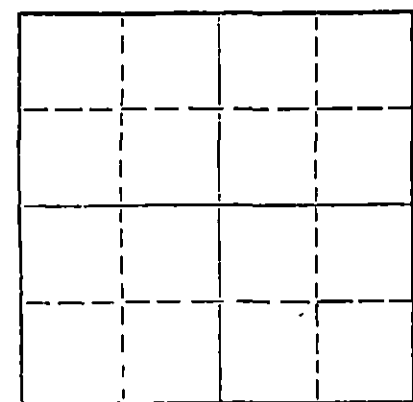

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5,100' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	948'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

RECEIVED
STATE CORPORATION COMMISSION
APR 18 1972
CONSERVATION DIVISION
Wichita, Kansas

Cement plug from 816' to 650' w/50 sx. 50-50 Pos.
Plug @ 40' w/1/2 sx. hulls 15 sx. cement
2 sx. Rathole

Name of Plugging Contractor Leben Drilling, Inc.
Address 100 Park Ave. Bldg. Suite 333, Oklahoma City, OK 73102

STATE OF Oklahoma Oklahoma, ss.
Brenda Swink (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That to her knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Brenda Swink
100 Park Ave, Suite 333, OKC, OK 73102
(Address)


SUBSCRIBED AND SWORN TO before me this 17th day of April, 1972

Leslie Kite
Notary Public.

My commission expires December 16, 1975

Company Champlin Petroleum Co.
Contractor Leben Drilling, Inc.
Farm Huck #2
Total Depth 5100'
Commenced 3-27-72
Completed April 12, 1972

Sec. 23 T. 34S R. 16W
Loc. C NE SW
County Comanche Co. KS
Casing 13 3/8 @ 20'
8 5/8 @ 915'
Production



Figures Indicate Bottom of Formations

0'-	20'	Gypsom-Hard
20'-	41'	Rock
41'-	1000'	Red Bed
1000'-	1590'	Red Bed & Shale
1590'-	2110'	Shale & Anhy.
2110'-	2266'	Anhy. & Shale
2266'-	4480'	Lime & Shale
4480'-	4725'	Lime
4725'-	5100'	Lime & Chert

RECEIVED
STATE CORPORATION COMMISSION
APR 19 1972
4-19-72
CONSERVATION DIVISION
Wichita, Kansas

State of Oklahoma
County of Oklahoma } SS

I, Brenda Swink of Leben Drilling, Inc., upon oath state that the above and foregoing is a true and correct copy of the log of the Huck #2 Well.

Brenda Swink

Subscribed and sworn to before me this 17th day of April, 1972

My Commission Expires: December 16, 1975 Leslie M. Kite