

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-21693-00-00
Spot: SENWSESE Sec/Twnshp/Rge: 23-30S-8W
712 feet from S Section Line, 745 feet from E Section Line
Lease Name: WSU Well #: 4
County: KINGMAN Total Vertical Depth: 4500 feet

Operator License No.: 33999
Op Name: LINN OPERATING, INC.
Address: 600 TRAVIS STE 5100
HOUSTON, TX 77002

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4493		1275 SX
SURF	8.625	314		225 SX

Well Type: EOR UIC Docket No: E26857.4 Date/Time to Plug: 07/28/2014 12:00 PM

Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.

Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone:

Proposed
Plugging
Method:

SPOT CEMENT PLUG ON BOTTOM. RAN TUBING TO 1250' & CIRC CEMENT TO 0'.

Plugging Proposal Received By: STEVE VANGIESON

WitnessType: PARTIAL

Date/Time Plugging Completed: 07/28/2014 5:00 PM

KCC Agent: STEVE VANGIESON

Actual Plugging Report:

COULD NOT GET PACKER TO RELEASE. PUMPED 100# HULLS & 25 SXS CEMENT THRU TUBING. SHOT TUBING OFF AT 4058', SPOTTED 10 SXS CEMENT PLUG. PULLED TUBING TO 1250' & CIRCULATED CEMENT TO SURFACE WITH 150 SXS CEMENT. BACKSIDE OF 5 1/2" CIRCULATED WITH CEMENT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
4242	4304	CSG	

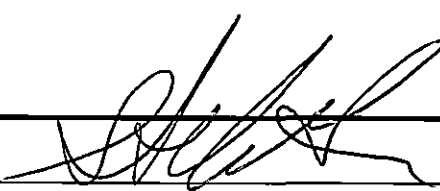
KCC WICHITA
AUG 0 8 2014
RECEIVED

Remarks: QUALITY WELL SERVICE -- DENIED TA

Plugged through: TBG

District: 02

Signed


cc: uic 8/8/14 (TECHNICIAN)
8.14.14 ckm

JK