


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Pratt County, Sec. 22 Twp. 26 Rge. 13 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

C NW NE
Lease Owner R & D Petroleum Inc.
Lease Name Griffith "C" Well No. #1
Office Address Box 298 Hoisington, Kansas 67544
Character of Well (Completed as Oil, Gas or Dry Hole)

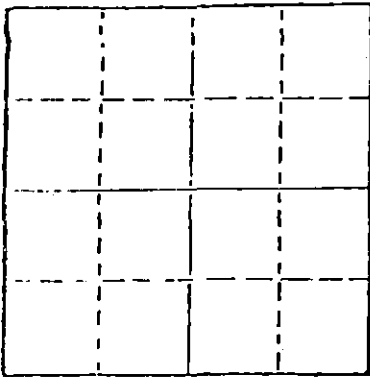

Locate well correctly on above
Section Plat

Dry Hole
Date Well completed 7-24- 1982
Application for plugging filed 7-24- 1982
Application for plugging approved 7-24- 1982
Plugging commenced 7-23- 11:00 pm 1982
Plugging completed 7-24- 4:15am 1982
Reason for abandonment of well or producing formation

Dry Hole
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Maurice Leslie
Producing formation Depth to top Bottom Total Depth of Well 4500
Show depth and thickness of all water, oil and gas formations.

set 8 5/8 @ 351'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole to 950' with heavy mud and mixed 60 sacks of cement and pumped in hole thru drill pipe.
Filled hole to 340' with heavy mud and mixed 40 sacks of cement and pumped in hole thru drill pipe.
Filled hole to 40' built solid bridge and pushed down plug and mixed 10 sacks of cement and filled hole to bottom of cellar; mixed 10 sacks and poured into the rat hole.
Mixed 3 sacks and poured into the water well.
All cement used was Common 2 % Gel 3% CC

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Future Drlg., Inc.

STATE OF Kansas COUNTY OF Russell, ss.
Stanley C. Lingreen (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) Stanley C. Lingreen
Box 293 Russell, Kansas 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of July, 1982

Paula J. Gibson
Notary Public.

My commission expires November 10, 1984

RECEIVED
STATE CORPORATION COMMISSION
AUG 04 1982
CONSERVATION DIVISION
Wichita, Kansas