


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Pratt County, Sec. 13 Twp. 26S Rge. 14W E/XX
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines _____
SW SW NE
Lease Owner Gee Oil Corp.
Lease Name Gee Well No. 1
Office Address Rural Route, Iuka, Kansas 67066
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Dry Hole
Date Well completed April 28, 1977
Application for plugging filed Verbal Application 1977
Application for plugging approved Verbal Approval 1977
Plugging commenced April 27, 1977
Plugging completed April 28, 1977
Reason for abandonment of well or producing formation _____

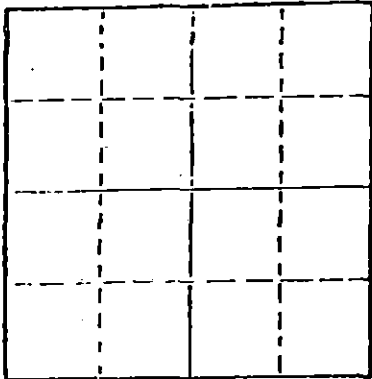

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Buddy Metz
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4466'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORD SUBMISSION

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	370'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4,466 ft. (rotary total depth) to 360 ft. Set plug at 360 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 360 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 15 sacks cement, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well cementing pump truck through 4-1/2 inch drill pipe.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services
410 Union Center, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 No. Main, Wichita, Kansas 67202
(Address)



SUBSCRIBED AND SWORN TO before me this 4th day of May, 1977

Elsie Willison
Elsie Willison - Notary Public.

My commission expires June 30, 1978

KANSAS GEOLOGICAL SOCIETY API # - 15-151-20,373
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Gee Oil Corp.**

SEC. 13 T. 26S R. 14W
 LOC. SW SW NE

FARM **Gee** NO. **1**

COUNTY **Pratt**

TOTAL DEPTH **4,466'**


COMM. **April 19, 1977**

COMP. **April 27, 1977**

SHOT OR TREATED

CONTRACTOR **H-30, Inc.**

ISSUED **April 28, 1977**



CASING

20	10	
15	8-5/8"	370' cemented w/300 sxs cement ELEVATION 1974 K.B.
12	6	
13	5	

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Red Bed	374'
Red Bed and Sand	893'
Anhydrite	904'
Shale and Red Bed	1,300'
Shale and Lime	2,200'
Lime	2,225'
Lime and Shale	2,725'
Shale and Lime	3,110'
Lime and Shale	3,146'
Lime	3,275'
Shale and Lime	3,730'
Lime	4,280'
Lime and Chert	4,350'
Lime	4,466'
Rotary Total Depth	4,466'

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 05 1977
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.


H-30, INC.

Dean Britting

 Dean Britting

State of Kansas }
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 28th. day of April, 1977.



Elsie Willison

 Elsie Willison - Notary Public

My Commission Expires:
 June 30, 1978