


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

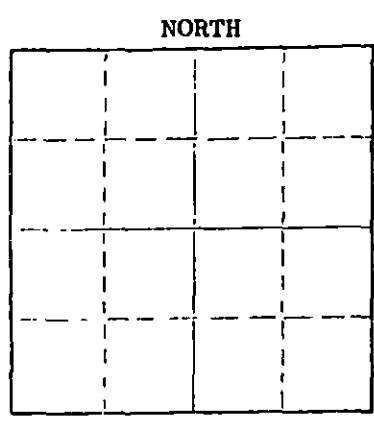

Locate well correctly on above Section Plot

Ellis County. Sec. 17 Twp. 12 Rge. 17 (E) III (W)  
Location as "NE/CNW/SE/SW" or footage from lines. SE SW NE  
Lease Owner Green Petroleum Co.  
Lease Name Miller Well No. 7  
Office Address P.O. Box 486 - Ellinwood, Ks. 67526  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed October 14 19 75  
Application for plugging filed October 14 19 75  
Application for plugging approved October 14 19 75  
Plugging commenced October 14 19 75  
Plugging completed October 14 19 75  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3716 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Hole full of heavy mud.  
Bottom Plug set at 550' with 50 sacks 50/50 Pozmix w/6% Gel thru drill pipe.  
Middle plug at 240' with 25 sacks " " " " " " " " " " " "  
Top plug at 40' with 172 sacks hulls, 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Duke Drilling Co.  
Address Box 823 - Great Bend, Ks. 67530

STATE OF Kansas COUNTY OF Barton, ss.  
Wayne Dobbs (employee of owner) or (owner/operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs  
Box 823 - Great Bend, Ks. 67530 (Address)

SUBSCRIBED AND SWORN TO before me this 15 day of October, 19 75

My commission expires April 11, 1978  
Wesley M. Hoque Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 16 1975  
10-16-75  
CONSERVATION DIVISION  
WICHITA, KANSAS

DRILLERS' WELL LOG

DATE COMMENCED: October 8, 1975  
DATE COMPLETED: October 14, 1975

Isorn Petroleum Company  
MILLER # 7  
SE SW NE of Sec 17-T12-R17  
Ellis County, Kansas

ELEVATION: 2162 K.B.

0	-	60'	Shale and Post Rock
60	-	248'	Shale and Sand Streaks
248	-	555'	Shale
555	-	627'	Sand and Shale
627	-	757'	Sand
757	-	1373'	Shale and Shells
1373	-	1418'	Anhydrite
1418	-	1960'	Shale and Shells
1960	-	2645'	Lime and Shale
2645	-	3374'	Lime
3374	-	3378'	Shale
3378	-	3666'	Lime
3666	-	3716'	Lime, Shale, Ghart, Sand
		3716'	RTD

FORMATION TOPS

Anhydrite	1380
Topeka	3135
Heshner	3374
Lansing	3423
Cong.	3666
RTD	3716

SURFACE PIPE:  
Set 248' of used 8 5/8", 28#  
pipe w/130 sacks Common, 2% Col,  
3% cc.

AFFIDAVIT

STATE OF KANSAS }  
COUNTY OF BARRON } ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Wayne Dobbs

Subscribed and sworn to before me this 15th day of October, 1975.

Dorothy M. Hague  
Notary Public

My Commission Expires: April 11, 1978

RECEIVED  
STATE OF KANSAS  
OCT 16 1975  
COMM. DIVISION  
Wichita, Kansas

15-051-21100-00-00

KANSAS

Form CP-3  
Rev. 6-4-68

STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT'S REPORT

RECEIVED  
STATE CORPORATION COMMISSION

J. Lewis Brock  
Administrator  
P. O. Box 17027  
Wichita, Kansas 67217

OCT 15 1975  
10-15-75  
CONSERVATION DIVISION  
Wichita, Kansas

Operator's Full Name Isern Petroleum Co.

Complete Address Box 486, Ellinwood, Kansas 67526

Lease Name Miller Well No. 7

Location SE SW NE Sec. 17 Twp. 12 Rge. (E) (W) 17

County Ellis Total Depth 3716'

Abandoned Oil Well        Gas Well        Input Well        SWD Well        D & A XX

Other well as hereafter indicated       

Plugging Contractor Duke Drlg.

Address Great Bend, Kansas License No.       

Operation Completed: Hour 8:45 A Day 14 Month 10 Year 1975

The above well was plugged as follows:

RTD 3716' 8 5/8 csg set 248' cwc 160 sk. Plg. Mat. 50-50 poz 6% total gel.

Gunned pits, circulated heavy mud, set 50 sk cmt plug at 550' thru drill pipe.

Heavy mud to 240' set 25 sk cmt plug thru drill pipe. Heavy mud to 40' set solid

bridge & 10 sk cmt plug to base of cellar.

I hereby certify that the above well was plugged as herein stated.

INVOICED

DATE 10/16/75

INV. NO. 2077-W

Signed: Leo Morsing  
Well Plugging Supervisor