

15-151-01168-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Pratt County, Sec. 9 Twp. 26 Rge. 13 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
NE NE NE

Lease Owner R & D Petroleum  
Lease Name Griffith "A" Well No. #1


Office Address Box 298 Hoisington, Kansas 67544  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole

Date Well completed 8-5 1982  
Application for plugging filed 8-5- 1982  
Application for plugging approved 8-5- 1982  
Plugging commenced 8-5- 3:00 pm 1982  
Plugging completed 8-5- 6:15 pm 1982  
Reason for abandonment of well or producing formation  
Dry Hole

If a producing well is abandoned, date of last production  
19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well J.H. Metz  
Producing formation Depth to top Bottom Total Depth of Well 4419'  
Show depth and thickness of all water, oil and gas formations.  
8 5/8 @ 362'

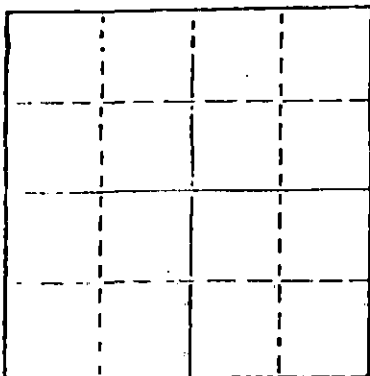

Locate well correctly on above  
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole to 620' with heavy mud and mixed 60 sacks of cement and pumped in hole thru drill pipe.

Filled hole to 350' with heavy mud and mixed 40 sacks of cement and pumped in hole thru drill pipe.

Filled hole to 40' built bridge pushed down plug and mixed 10 sacks of cement and filled hole to bottom of cellar; mixed 10 sacks and poured into the rat hole. 3 sacks into the water well.

All cement used was Common 2 % Gel 3% CC

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Future Drlg., Inc.

STATE OF Kansas COUNTY OF Russell, ss.  
Stanley C. Lingreen (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) Stanley C. Lingreen  
Box 293 Russell, Kansas 67665  
(Address)

SUBSCRIBED AND SWORN TO before me this 10th day of August, 1982

Paula J. Gibson  
Notary Public.

My commission expires November 10, 1984

RECEIVED  
STATE CORPORATION COMMISSION

AUG 20 1982

CONSERVATION DIVISION  
Wichita, Kansas