

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-077-21936-00-00
Spot: S2S2NESE Sec/Twnshp/Rge: 18-35S-7W
1500 feet from S Section Line, 660 feet from E Section Line
Lease Name: KRISTINE 3507 Well #: 1-18
County: HARPER Total Vertical Depth: 5056 feet

Operator License No.: 34192
Op Name: SANDRIDGE EXPLORATION AND PRO
Address: 123 ROBERT S. KERR AVE
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	5056		250 SX
SURF	8.625	840		530 SX
T1	2.875	4808		

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 07/16/2014 8:00 AM
Plug Co. License No.: 3004 Plug Co. Name: GRESSEL OILFIELD SERVICE, LLC
Proposal Rcvd. from: GEORGE Company: _____ Phone: _____

Proposed Plugging Method: CIBP @ 4770' & 5 SXS. 50 SXS @ 900'. 50 SXS @ 1300'. CIRC 300'.

Plugging Proposal Received By: _____ WitnessType: PARTIAL
Date/Time Plugging Completed: 07/16/2014 10:15 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

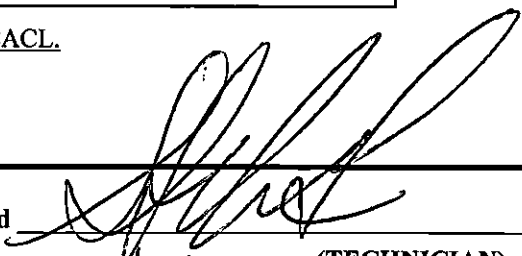
CIBP @ 4755 & 5 SXS CEMENT. LOADED CASING WITH PLUG MUD. REC CASING FROM 1706'. RAN TUBING TO 1350' SPOTTED 50 SXS CEMENT. PULLED TUBING TO 900' SPOTTED 60 SXS CEMENT. PULLED TUBING TO 300' CIRCUALTED WITH 105 SXS.

Perfs:

Remarks: COPELAND CEMENT & ACID COM 3% CACL.

Plugged through: TBG

District: 02

Signed 
9.9.14 ckm (TECHNICIAN)

Received
KANSAS CORPORATION COMMISSION
SEP 02 2014
CONSERVATION DIVISION
WICHITA, KS