

1 120048

11-16-87

API NUMBER 15-151-21,619-0000

To: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING SECTION
200 COLORADO DERBY BUILDING
WICHITA, KANSAS 67202

SE SE SE, SEC. 36, T 26 S, R 12 W/R
330 feet from S section line
330 feet from E section line

TECHNICIAN'S PLUGGING REPORT

Operator License # 3181

Lease Name Shriver Well # 1

Operator: W.K. Black PPPLP
Name & Address 1540 North Broadway, Suite 202
Wichita, KS 67214

County Pratt 146.54
Well Total Depth 4509 feet
Conductor Pipe: Size _____ feet
Surface Casing: Size 8 5/8 feet 308

Abandoned Oil Well Gas Well _____ Input Well _____ SWD Well _____ D&A _____

Other well as hereinafter indicated _____

Plugging Contractor Kelso Casing Pulling, Inc. License Number 6050

Address P.O. Box 347, Chase, KS 67524

Company to plug at: Hour: 11 a.m. Day: 16 Month: 11 Year: 1987

Plugging proposal received from Millard Kelso

(company name) Kelso Casing Pulling, Inc. (phone) 316-938-2457

were: 4 1/2" at 4506' Perfs at 3845-47' Elevation 1858'GL

1st plug pump 40 sx to 3700' with 1000 lbs.,
2nd plug pump 3 sx hulls, 10 sx gel, 50 sx cement, 10 sx gel, 1 sx hulls, release 8 5/8"
wiper plug and pump 100 sx cement.

Plugging Proposal Received by Steve Durrant
(TECHNICIAN)

Plugging Operations attended by Agent?: All Part _____ None _____

Operations Completed: Hour: 12 p.m. Day: 16 Month: 11 Year: 1987

ACTUAL PLUGGING REPORT 1st plug pumped into 4 1/2" casing with 50 lbs. hulls and 40 sx cement.

Shut in with 1000 psi at 3700',
2nd plug pumped into 8 5/8" surface casing with 300 lbs. hulls, 10 sx gel, 50 sx cement,
10 sx gel, 100 lbs. hulls and 100 sx cement.

STATE CORPORATION COMMISSION

Pumping pressure 200-500 psi. Shut in pressure 0 psi.

NOV 19 1987

11-19-87
CONSERVATION DIVISION
WICHITA, KANSAS

Remarks: Used 60/40 Pozmix 6% gel by Allied. Recovered 3000' of 4 1/2" casing.
(If additional description is necessary, use BACK of this form.)

I (did/did not) observe this plugging.

DATE 12-3-81

Signed Duane Rankin
(TECHNICIAN)

INV. NO. 19081

Work of File Com

15-151-21619-0000




DUAL GUARD MICRO
GUARD LOG


OPEN HOLE

1/4 mi. to
Hwy 61

COMP. W. K. BLACK, INC. WELL SHRIVER NO. 1 FIELD N/A COUNTY PRATT ST. KANSAS	COMPANY	H. K. BLACK, INC.			
	WELL	SHRIVER NO. 1			
	FIELD	N/A			
	COUNTY	PRATT	STATE	KANSAS	
	APT. NO.	SE-SE-SE	OTHER SERVICES	DSN-COL	
<h1>FIELD PRINT</h1>					
SEC. 36	TWP. 26S	RGE. 12W			
PERMANENT DATUM	GROUND LEVEL	ELEV. 1858	ELEV.: K.B. 1867		
LOG MEASURED FROM	KELLY BUSHING	9 FT. ABOVE PERM. DATUM	D.F.		
DRILLING MEASURED FROM	KELLY BUSHING		G.L. 1858		
DATE	07/07/85	07/07/85	07/07/85	07/07/85	
RUN NO.	GAMMA	LONG GUARD	SHORT GUARD	MICRO GUARD	
DEPTH-DRILLER	4545	4545	4545	4545	
DEPTH-WELEX	4550	4550	4550	4550	
BTH. LOG INTER.	4521	4534	4528	4548	
TOP LOG INTER.	CASING	CASING	CASING	CASING	
CASING-DRILLER	8 5/8 @ 312	@	@	@	
CASING-WELEX	308				
BIT SIZE	7 7/8				
TYPE FLUID IN HOLE	PRE/GEL/STARCH				
DENS. : VISC.	9.7 : 41	:	:	:	
PH : FLUID LOSS	7.00 : 10.4 ML	:	ML	:	
SOURCE OF SAMPLE	MUD PIT				
RM @ MEAS. TEMP.	0.31 @ 87 F	@	F	@	
RMF @ MEAS. TEMP.	0.24 @ 85 F	@	F	@	
RMC @ MEAS. TEMP.	0.43 @ 84 F	@	F	@	
SOURCE RMF RMC	MEAS : MEAS.	:	:	:	
RM @ BHT	0.23 @ 120 F	@	F	@	
TIME CIRC. STOPPED	10:30 PM				
TIME ON BOTTOM	12:30 AM 7-8-85				
MAX. REC. TEMP.	120 F@ TD	F@	F@	F@	
EQUIP. : LOCATION	1891 : PRATT	:	:	:	
RECORDED BY	G. FOX/M. STUCKEY				
WITNESSED BY	R. FALWELL				

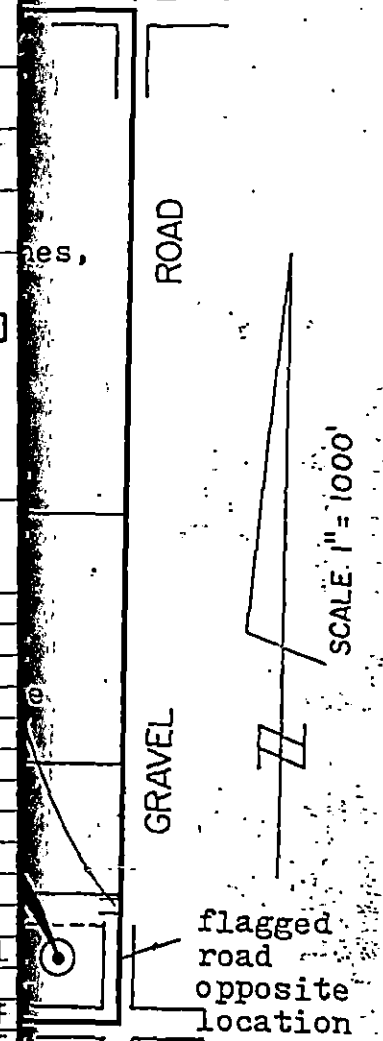

ANDERSON
REGISTERED
S-802
KANSAS
SURVEYOR

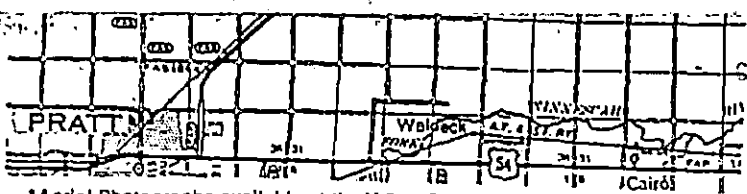

CONSERVATION DIVISION
Wichita Kansas

Randy E Anderson
Randy E. Anderson, R.L.S. 802

* Aerial Photographs available at the U.S. A.S.C.S. Office located at the County Seat.
* Elevations derived from National Geodetic Vertical Datum.

Date February 13, 1985