


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Pratt County, Sec. 20 Twp. 27 S Rge. 11 NE/W  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines

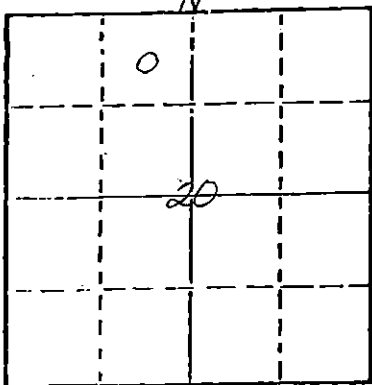

Locate well correctly on above  
Section Plat

C NE NW  
Lease Owner The Maurice L. Brown Co.  
Lease Name Deitz Well No. 1  
Office Address 200 Sutton Place Bldg., Wichita, Ks. 67202  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole

Date Well completed Oct. 21, 1977  
Application for plugging filed (verbally) Oct. 21, 1977  
Application for plugging approved (verbally) Oct. 21, 1977  
Plugging commenced Oct. 21, 1977  
Plugging completed Oct. 21, 1977  
Reason for abandonment of well or producing formation  
No commercial quantity of oil or gas encountered  
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Owens  
Producing formation Depth to top Bottom Total Depth of Well 4575'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set 1st plug at 500' with 40 sacks  
2nd plug at 350' with 24 sacks  
40' solid bridge with 12 sacks  
3 sacks in rathole  
Plug was down at 5:45 p.m., October 21, 1977

RECEIVED  
STATE CORPORATION COMMISSION

OCT 26 1977


CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Abercrombie Drilling, Inc.

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Jack L. Partridge, Assistant Secretary-Treasurer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack L. Partridge  
801 Union Center, Wichita, Kansas 67202  
(Address)



Sandra Richman  
Sandra Richman Notary Public.

CONTRACTOR'S WELL LOG

OPERATOR: The Maurice L. Brown Co.  
 CONTRACTOR: Abercrombie Drilling, Inc.  
 WELL NAME: Deitz #1  
 LOCATION: C NE NW Section 20-27S-11W  
 Pratt County, Kansas  
 SPUD DATE: October 7, 1977  
 COMPLETION DATE: October 21, 1977

0	25	Sand
25	377	Sand, sand rock
377	987	Shale & shells
987	1592	Shale
1592	1638	Shale & shells
1638	1869	Shale
1869	2548	Shale & lime
2548	3900	Lime & shale
3900	4215	Lime
4215	4314	Lime & shale
4314	4370	Shale & lime
4370	4448	Lime
4448	4472	Lime & shale
4472	4575	Lime
	4575	Rotary Total Depth

Spud hole at 4:30 a.m., October 7, 1977. Drilled 370' of 12 1/4" hole, ratholed to 950' with 7-7/8" bit. Ran 9 joints of 8-5/8" - 24# surface casing. Set at 360' with 175 sacks Halliburton light cement with 3% CaCl, 1/4# Flocel, followed with 150 sacks Class "A" Cement, 3% CaCl, 1/4# Flocel. Plug was down at 2:00 a.m., October 8, 1977 - no returns - cemented through 1" to 120' with 100 sacks, no returns.

T.D. 4575'. Set 1st plug at 500' with 40 sacks, 2nd plug at 350' with 24 sacks, 40' solid bridge with 12 sacks, 3 sacks in rathole. Plug was down at 5:45 p.m., October 21, 1977.

RECEIVED  
 STATE CORPORATION COMMISSION

OCT 26 1977

CONSERVATION DIVISION  
 Wichita, Kansas


STATE OF KANSAS )  
 ) ss  
 COUNTY OF SEDGWICK )

Jack L. Partridge, Assistant Secretary-Treasurer of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the Deitz #1, C NE NW Section 20-27S-11W, Pratt County, Kansas.

ABERCROMBIE DRILLING, INC.

By Jack L. Partridge  
 Jack L. Partridge,  
 Assistant Secretary-Treasurer

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 25th day of October, 1977.



Sandra Richman  
 Sandra Richman, Notary Public