


15-135-20569-0001

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

### WELL PLUGGING RECORD

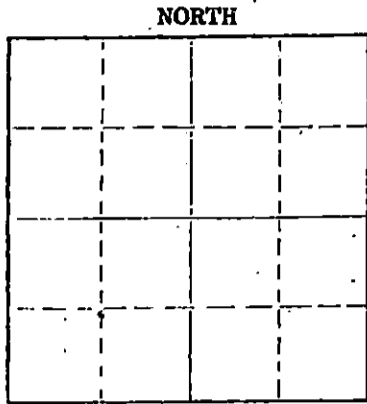

Locate well correctly on above Section Plat

Ness County, Sec. 19 Twp. 16 Rge. 26 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW SW SW

Lease Owner Thunderbird Drilling, Inc.

Lease Name Horshem #2 Well No. \_\_\_\_\_

Office Address Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Date well completed \_\_\_\_\_ 19\_\_

Application for plugging filed \_\_\_\_\_ 19\_\_

Application for plugging approved \_\_\_\_\_ 19\_\_

Plugging commenced 4/24/75 \_\_\_\_\_ 19\_\_

Plugging completed 4/28/75 \_\_\_\_\_ 19\_\_

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Massey

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4553 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	334	none
				5 1/2	4548	1604'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Checked bottom, pushed plug to 4160' and sanded to 4155', dumped 5 sacks cement. Loaded hole, shot pipe at 3002', 2726', 2339', 2138', 2034', 1940', 1842', 1745', 1642', pulled 71 joints. Allied pumped 1 sack hulls, 30 sacks gel and 120 sacks 50-50 poz.

**PLUGGING COMPLETE.**

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.

Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE SE.

NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Noel Knight*

CHASE, KANSAS  
(Address)

Subscribed and sworn to before me this 6th day of May 1975

*Margaret Melcher*  
Notary Public.

My commission expires \_\_\_\_\_

NOTARY PUBLIC  
KANSAS

**MARGARET MELCHER**  
Rice County, Ks.  
My Comm. Exp. Feb. 15, 1979

**RECEIVED**  
STATE CORPORATION COMMISSION  
MAY 9 1975  
CONSERVATION DIVISION  
Wichita, Kansas