

15-151-10556-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

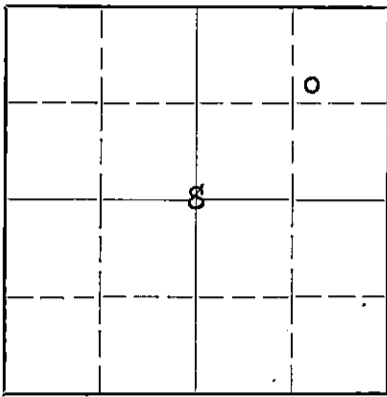

Locate well correctly on above
Section Plat

Pratt County, Sec. 8 Twp. 26S Rge. (E) 12 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW NE NE 1/4
Lease Owner Shell Oil Co., Inc.
Lease Name M. Winter Well No. 1
Office Address Box 744, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 30 19 43
Application for plugging filed December 4 19 43
Application for plugging approved December 21 19 43
Plugging commenced December 2 19 43
Plugging completed December 2 19 43
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander
Producing formation Arbuckle Depth to top 4329 Bottom Total Depth of Well 4374 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle	30' heavy mud, 240' muddy salt water & 3000' salty water; from 15 min. drill stem test.	4335	4374	8 5/8"	893'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud from 4374 to 300' & set
bridge; cemented from 300' to 275' with 15 sax;
mudded from 275' to 26', set bridge & capped into
cellar with 10 sax cement.

PLUGGING
FILE SEC 8 26 & 120
BOOK PAGE 10 LINE 24



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Shell Oil Co., Inc.
Address c/o W. M. Gholson, Box 744, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
W. M. Gholson (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Box 744, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of December, 1943.

My commission expires 1-24-45
Latty Pestlethwaite Notary Public.

Shell, M. Winter #1
 SW NE NE 8-268-12W
 Pratt County, Kansas

CASING RECORD

8 5/8" cem. 893 with 450 sax.

- | | |
|--|-----------------------------|
| 0 - 30 surface soil & sand | 4228 chert & lime |
| 132 sand | 4251 lime & shale |
| 215 sand & gravel | 4269 sandy shale & lime |
| 410 red bed & sand | 4298 lime & shale |
| 600 red bed | 4315 lime & chert streaks |
| 725 red bed & shells | 4327 lime & chert |
| 740 shale & shells & sand | 4330 lime & shale |
| 770 shale & shells | Top Arbuckle 4329 (correct) |
| 825 shale & lime | 4375 dolomite |
| 896 anhydrite & lime | 4375=4374 SLC T.D. |
| 1300 shale & shells | |
| 1510 salt, shale & shells | |
| 1700 shale & shells | |
| 1815 sandy shale & shells | |
| 2122 lime & shale | |
| 2200 broken lime & pyrite | |
| 2255 sandy lime & shale | |
| 2311 lime & shale | |
| 2370 lime | |
| 2537 lime & shale | |
| 2623 shale & shells | |
| 3039 lime & shale | |
| 3114 shale & shells | |
| 3197 lime & shale | |
| 3368 lime | |
| 3397 sandy lime | |
| 3401 lime & shale | |
| 3545 lime | |
| 3595 sandy lime & shale | |
| 3598 shale | |
| 3635 lime & shale | |
| 3635=3625 SLC | |
| Top Topeka 3147 | |
| 3658 lime | |
| 3754 lime & shale | |
| Top Lans. Kans. City 3683 | |
| 4014 lime | |
| 4061 lime & chert | |
| 4091 lime, shale & chert | |
| Top Mississippi 4091 | |
| 4099 chert | |
| 4112 lime & chert | |
| 4131 chert & shale | |
| 4140 chert Top Viola 4131 | |
| 4151 chert & lime 4149=4148 SLM(Kelly) | |
| 4173 shale & chert | |
| 4196 lime & chert | |
| 4225 lime | |
| Top Simpson 4225 | |

8 26-12W
 101 24

12-8-43