

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR
FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Blitting Building
Wichita, Kansas

Pratt County. Sec. 30 Twp. 26 Rge. (E) 14(W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE SE
Lease Owner Mid-Continent Petroleum Corp.
Lease Name Lee Leonard Well No. 1
Office Address Box 1362 Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed July 11 1948
Application for plugging filed July 11 1948
Application for plugging approved July 11 1948
Plugging commenced July 12 1948
Plugging completed July 12 1948
Reason for abandonment of well or producing formation Dry hole

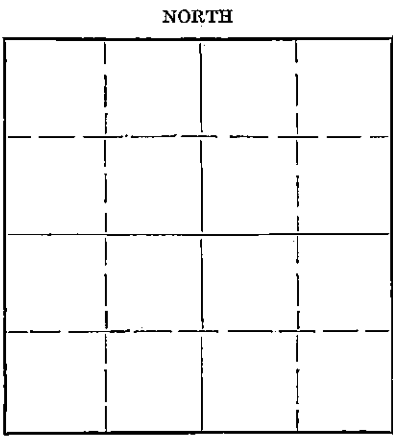

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production Dry hole 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Depth to top Bottom Total Depth of Well 4643 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Kansas City	Water	3906		8 5/8	977'10"	None
Viola	"	4421				
Simpson	"	4505				
Arbuckle	"	4586	4643			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with heavy rotary mud through drill pipe 975-4643
Halliburton plug at 975
15 sax cement 930-975
Heavy rotary mud 250-930
Halliburton plug 250
15 sax cement 205-250
Heavy rotary mud 35-205
Halliburton plug 35
10 sax cement 5-35
5' cellar will be filled to ground level

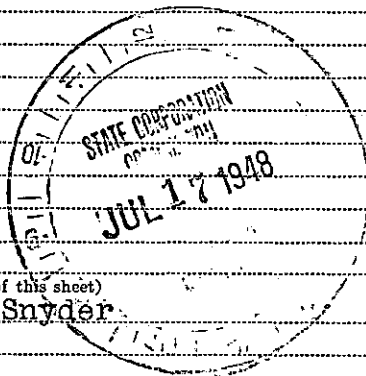

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Lloyd Snyder
Address Box 1362 Wichita 1, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Lloyd Snyder (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Lloyd Snyder

(Address)

SUBSCRIBED AND SWORN to before me this 16 day of July, 1948

Mae Risco
Notary Public.

My commission expires

