

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

Pratt County, Sec. 32 Twp. 26 Rge. 14 (E) (W)
SE SE SE

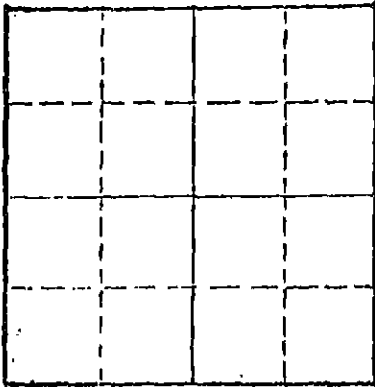

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from loss _____
Lease Owner Raymond Oil Co., Inc.
Lease Name Berry #1 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 11/16/73 _____ 19____
Plugging completed 11/21/73 _____ 19____
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4210 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	328	none
				4 1/2	4208	3206t

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked bottom, ran sand to 4200' and ran 3 sacks cement, loaded hole. Shot pipe at 3358', 3250', pulled 97 joints of 4 1/2" casing. Bailed hole to 260', set 10' rock bridge and dumped 4 yards ready mix.

PLUGGING COMPLETE

RECEIVED
STATE CORPORATION COMMISSION
DEC 4 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.

NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

Subscribed and Sworn to before me this 28th day of November, 19 73

My commission expires _____

MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

Margaret Melcher
Notary Public.

STENCILED

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

ORIGINAL

AUG 12 1967

COMPANY AMARILLO NATURAL GAS CO., INC.

SEC. 32 T. 26 R. 14W

LOC. SE SE SE

FARM Berry

NO. 1

TOTAL DEPTH 4210'

COUNTY Pratt


COMM. 1-17-67

COMP. 1-27-67

KANSAS

SHOT OR TREATED

CONTRACTOR Strata Drlg., Inc.



ISSUED 8-12-67

CASING

20	10	
15	8 5/8	328' w/200 sx cem.
12	6	
13	8 4 1/2	4208' w/125 sx cem.

ELEVATION 2004' KB

PRODUCTION Pmp 15 BOPD
& 55% W. (Lans 4096-97)

FIGURES INDICATE BOTTOM OF FORMATIONS

sand shale	885
shale	1975
lime shale	3985
lime	3973
lime chert	4038
lime	4210
TD	4210

Tops Scout	
Heebner	3704
Toranto	3725
Douglas	3775
Lansing	3894
" "	A 3894
" "	B 3916
" "	C 3944
" "	D 3981
" "	E 4042
" "	F 4123
" "	G 4168

RECEIVED
STATE CORPORATION COMMISSION
OCT 24 1973
CONSERVATION DIVISION
Wichita, Kansas