


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

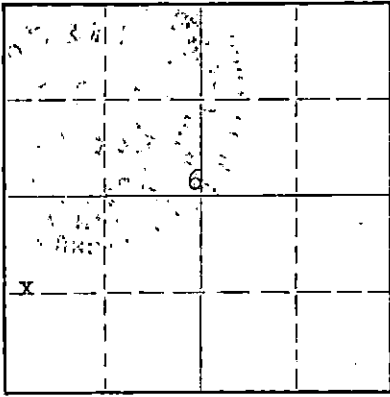

Locate well correctly on above
Section Plat

Pratt County, Sec. 6 Twp. 265 Rge. 14 (E) (W)
Location as "NE/CNW&SW" or footage from lines CW $\frac{1}{2}$ W $\frac{1}{2}$ SW $\frac{1}{4}$
Lease Owner International Oil Corp., Inc.
Lease Name Gereke Well No. _____
Office Address 440 Oil Hill Road, El Dorado, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed 3-27-63 19____
Application for plugging filed 5-28-1968
Application for plugging approved 5-28-1968
Plugging commenced 5-29-1968
Plugging completed 6-1-1968
Reason for abandonment of well or producing formation Gas exhausted - making water.
If a producing well is abandoned, date of last production Dec. 1967
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation Miss. chat Depth to top 4250 Bottom 4260 Total Depth of Well 4502 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Miss. chat	Gas	4250	4260	4 1/2	4501	3500
				8 3/8	287	none


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bridge plug set @ 3872 - perforations @ 3831 to 3833 - sand back from 3872 to 3825 - dump 4 sax cement - pull 3500 ft. 4 1/2" pipe - mud to 275 ft. - 10 ft. rock bridge to 265 ft. - dump 25 sax cement - mud to 40 ft. - 10 ft. rock bridge to 30 ft. - dump 10 sax cement to surface.

RECEIVED
STATE CORPORATION COMMISSION
JUN 6 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Ralph Comstock Pipe Pulling, Inc. Permit # 490
Address Stafford, Kansas 67578

STATE OF Kansas, COUNTY OF Stafford, ss. _____ (employee of owner) or (owner or operator) of the above-described well, hereby sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.



(Signature) Ralph Comstock
320 N. Park, Stafford, Kansas 67578
(Address)
5 day of June, 1968
Ray Henry
Notary Public.