


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

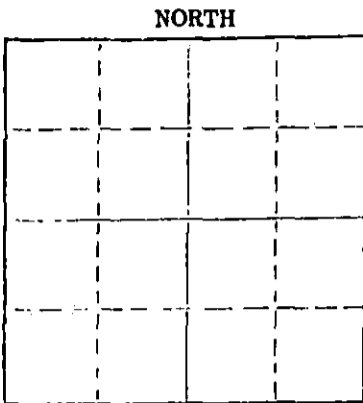

Pratt County, Sec. 31 Twp. 26 Rge. 12w (E) (W)  
Location as "NE/CNW&SW" or footage from lines. NE-NW-NE  
Lease Owner. Ronald Russ Prater  
Lease Name. Binger Well No. 16  
Office Address. 235 Park Plaza Bldg., 240 N. Rock Rd., Wichita, Ks.  
Character of Well (completed as Oil, Gas or Dry Hole) Gas  
Date well completed 19  
Application for plugging filed July 7 19 75  
Application for plugging approved July 7 19 75  
Plugging commenced July 7 19 75  
Plugging completed July 9 19 75  
Reason for abandonment of well or producing formation Dry Hole  
If a producing well is abandoned, date of last production none 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Russ Biberstein  
Producing formation Depth to top Bottom Total Depth of Well 4304 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	421'	none
				5 1/2	2160'	1670'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

(BOTTOM HOLE PLUG)---Sand from total depth to 1900' and dump 5 sacks of cement.

(TOP HOLE PLUG)---plugged with 100 sacks of 50/50 pos mix 2% gell--10 gell and 2 hulls. Mixed hulls and mud and released plug and pumped cement into surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dunbar Drilling Inc.  
Address 5252 N. Broadway, Wichita, Kansas 67219

STATE OF Kansas COUNTY OF Sedgwick ss.  
W. P. Simmons (employee of owner) or (owner operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. P. Simmons  
5252 N. Broadway Wichita, Ks. 67219  
(Address)

SUBSCRIBED AND SWORN TO before me this 24 day of July, 19 75

My commission expires Nov. 19, 1977  
Frances J. Simmons Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION

JUL 29 1975  
7-29-75  
CONSERVATION DIVISION  
Wichita, Kansas

15-151-20244-0000

DRILLERS LOG

BINGER NO. 16

CASING RECORD:

8 5/8" set at 421'  
w/300 sax cement

TOTAL DEPTH:  
4303'

OPERATOR: Ronald Russ Pratter, Inc.

CONTRACTOR: Search Drilling Company

COMMENCED: April 17, 1974

COMPLETED: April 28, 1974

DESCRIPTION:

NE NW NE,  
Sec. 31-26S-12W  
Pratt County,  
Kansas

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Roots and Clay	0	70	
Sand	70	260	
Red Bed and Shale	260	525	
Red Bed and Shale	525	747	
Anhydrite	747	768	
Red Bed and Shale	768	921	
Shale	921	1478	
Shale and Lime	1478	1800	
Shale and Lime	1800	1819	
Shale with streaks of Lime	1819	1990	
Lime	1990	2090	
Lime and Shale	2090	2263	
Lime and Shale	2263	2435	
Lime and Shale	2435	2635	
Lime and Shale	2635	2705	
Lime and Shale	2705	2785	
Lime and Shale	2785	2965	
Lime and Shale	2965	3120	
Shale and Lime	3120	3165	
Lime and Shale	3165	3295	
Lime and Shale	3295	3445	
Lime and Shale	3445	3540	
Lime and Shale	3540	3560	
Lime	3560	3725	
Lime	3725	3850	
Lime	3850	3981	
Lime	3981	4086	
Lime - Chert - Shale	4086	4197	5 1/2" used 14#
Sand	4197	4225	set at 2160'
Lime	4225	4250	w/100 sax cement,
Simpson Shale	4250	4275	2% get, 10% salt.
Simpson Shale	4275	4290	Ran cement basket
Arbuckle	4290	4303	in middle cemented at 2160'

RECEIVED  
JUL 8 1975  
7-3-75

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SEARCH DRILLING COMPANY

William J. Froelich, Jr.

Subscribed and sworn to before me this 30th day of April, 1974.

Maxine Dressen  
Maxine Dressen - Notary Public

