
Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

INV. NO.

Well Plugging Authority, issued April 13, 1967.

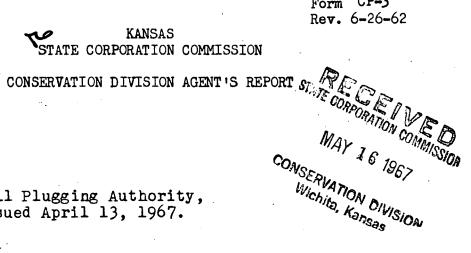

Onsas CON
Operator's Full Name Skelly Oil Company
Complete Address: P. O. Box 649, McCook, Nebraska 69001
Lease Name Cunningham "B" Unit Well No. # 48
Location <u>C W/2 NW NW</u> Sec. 36 Twp. 27 Rge. 11 (E) (W)W
County Pratt Total Depth 3520'
Abandoned Oil Well Gas Well Input Well X SWD Well D & A
Other well as hereafter indicated:
Plugging Contractor: Ralph Comstock Pipe Pulling Inc.
Address: Stafford, Kansas License No. 490
Operation Completed: Hour 9:30AM Day 15th Month May Year 1967
The Above well was plugged as follows:
362' of 10 3/4" surface pipe, cemented with 200 sacks. 3459' of 52" long
string, cemented with 400 sacks. Plug back T.D. 3511'. Open hole from 3511'
to 3459'. Bottom of the hole was sanded to 3420', and cemented with 20 sacks
through the dump bailer. 1821' of 5½" long string was recovered from the
hole. Fluid level in the hole was at 320', bridge plug and rock bridge from
320' to 310', and cemented with 30 sacks. Hole was filled with mud to 40',
rock bridge from 40' to 30', and cemented with 15 sacks to the base of the
cellar.
I hereby certify that the above well was plugged as herein stated.
INVOICED Signed: Cuelie Elving
DATE