

15-151-10562-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County, Sec. 12 Twp. 26S Rge. 11/ 12 (W)

Location as "NE/CNWxSWx" or footage from lines S/2 SE/4 SE/4

Lease Owner Monsanto Chemical Company

Lease Name Ford Well No. 5

Office Address P. O. Box 580, Pratt, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil Well

Date well completed October 26, 1945

Application for plugging filed February 28, 1956

Application for plugging approved February 29, 1956


Plugging commenced March 19, 1956

Plugging completed March 19, 1956

Reason for abandonment of well or producing formation Well has ceased to produce enough oil to pay for operation of well.

If a producing well is abandoned, date of last production November 19 55

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

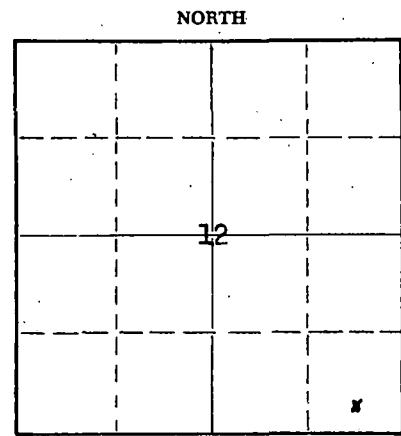

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M. A. Rives

Producing formation Viola Depth to top 4157' Bottom Total Depth of Well 4158 Feet

Show depth and thickness of all water, oil and gas formations. Plugged back total depth = 3670 feet.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				9"	287'	None
				5 1/2"	4158'	2087'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with sand from 3670' to 3640' with 5 sacks of cement on top of sand. Shot pipe off @ 2087' and pulled 10 joints. Circulated heavy mud. Heavy mud from 3640' to 285'. Rock plug @ 285' with 20 sacks of cement on top of plug. Heavy mud to 35'. Set Rock plug @ 35' with 10 sacks of cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor West Supply Company
Address Chase, Kansas

STATE OF KANSAS, COUNTY OF PRATT, ss.
J. B. Gibbs (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

P. O. Box 580, Pratt, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 20th day of March, 19 56

[Signature] Notary Public.

My commission expires September 19, 1959

PLUGGING
FILE SEC 12 T 26 R 12W
BOOK PAGE 42 LINE 13

MAR 21 1956
3-21-56
CONSERVATION DIVISION
Wichita, Kansas


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

Company - LION OIL CO.
Farm - Ford No. 5.

SEC. 12 T. 26 R. 12 W
CS $\frac{1}{2}$ SE SE

Total Depth. 4162
Comm. 9-20-45 Corp. 12-5-45
Shot or Treated.
Contractor.
Issued. 4-20-46

County. Pratt
KANSAS



CASING:
9" 286' Cem.
5 1/2" 4157' Cem.

Elevation. _____
Production. Phy. Pot. 85 B

Figures Indicate Bottom of Formations.

surface clay	35
shale, shells & sand	307
red bed	675
shale, shells & red bed	1075
shale & shells	1380
salt, shale & shells	1580
shale	1600
lime	1795
lime & shale	1800
shale & shells	1860
lime	1921
shale & shells	2110
shale	2160
shale & lime shells	2200
shale & shells	2280
shale	2325
shale & shells	2353
lime & shale	2375
shale	2480
shale & shells	2535
shale & lime sdy	2590
lime & shale	2660
shale & shells	2750
shale	2790
lime	2835
lime shells & shale	2880
shale & lime	2960
shale & shells	2980
shale	3000
lime brkn	3065
shale strks lime	3135
lime	3180
lime & shale	3232
lime	3310
lime & shale strks	3385
lime strks of shale	3430
lime cherty	3468
shale & strks of lime	3522
shale	3556
shale sticky	3586
shale	3615
lime & shale strks	3792
lime & shale brks	3838
lime	3894
lime & shale brks	3930
shale	3992
shale & shells	4030
chert	4044
shale	4156
Viola chat	4162
Total Depth	

Top Viola 4157

PLUGGING
FILE SEC 12 T 26 R 12
BOOK PAGE 42 LINE 13

RECEIVED
COMMISSION
MAR 1 - 1956
3-1-56
CONSERVATION DIVISION
Wichita, Kansas