


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

Barber County, Sec. 4 Twp. 35 Rge. 15 (E) W (W)
Location as "NE/CNW/SW4" or footage from lines C W/2
Lease Owner K & E Drlg. and Westmore Drlg. Co.
Lease Name Davis Ranch Well No. 2-4
Office Address 816 Union Center Blvd. ; Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Gas
Date well completed February 19 66
Application for plugging filed December 19 73
Application for plugging approved December 28 19 73
Plugging commenced February 19 19 74
Plugging completed February 28 19 74
Reason for abandonment of well or producing formation Depletion

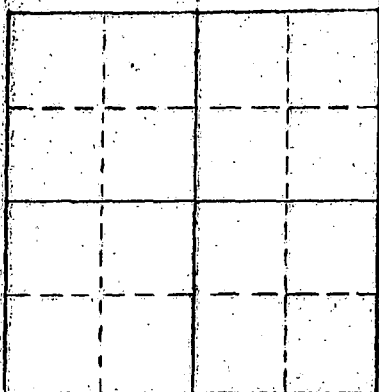

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein
Producing formation Mississippi Depth to top 5083' Bottom 5116' Total Depth of Well 5168 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1085	None
				4 1/2"	5166	4340

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

February 19, 1974 Plugged off bottom. Dumped sand to 5000'.
Mixed and dumped 4 sx of cement.
February 28, 1974 Plugged off top. Set 10' rock bridge at 250'.
Filled 8 5/8" surface casing from 250' to
base of cellar with 3000 lb. P.S.I. ready-
mix concrete.

RECEIVED
STATE CORPORATION COMMISSION
MAR 13 1974
3-13-74
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor RUSS CASING PULLING, INC.
Address P. O. Box 1082 ; Great Bend, Kansas 67530

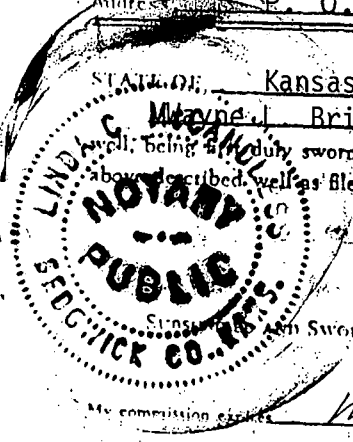

STATE OF Kansas COUNTY OF Sedgwick
Wayne L. Brinegar (employee of owner) or ~~XXXXXX~~ of the above-described
above-described well as filed and that the same are true and correct. So help me God.
(Signature) Wayne L. Brinegar
816 Union Center Building, Wichita, Kansas (Address)
I have sworn to before me this 12th day of March 19 74
March 29, 1977
Quade C. McAndrews Notary Public.

DRILLER'S WELL LOG

OPERATOR: K & E Drilling, Inc.
719 Union Center
Wichita, Kansas 67202

WELL NAME: Davis Ranch #2-4
LOCATION: 460'N & 420'W of Cen.W/2
Section 4-35S-15W
Barber County, Kansas

CONTRACTOR: **K&E DRILLING, INC.**
719 UNION CENTER BLDG.
WICHITA, KANSAS

COMMENCED: 1-13-66
COMPLETED: 1-26-66

CASING RECORD: 8-5/8" @ 1085' w/500 sx.
4-1/2" @ 5166' w/100 sx.

ELEVATION: 1765 Gr. 1771 DF 1774 KB

ROTARY TOTAL DEPTH: 5168'

PRODUCTION: Gas

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Clay & Gyp	35
Red Bed, Shale & Shells	490
Red Bed	1085
Shale & Shells	2130
Lime & Shale	2410
Lime	4017
Lime & Shale	4105
Lime	5168 T.D.

RECEIVED
STATE CORPORATION COMMISSION
DEC 28 1973
12-28-73
CONSERVATION DIVISION
Wichita, Kansas

CERTIFICATION

State of KANSAS }
County of SEDGWICK } ss:

I, Wayne L. Brinegar, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Subscribed and sworn to before me this 3rd day of February, 1966

My Commission expires: 8-30-69

Wayne L. Brinegar
Wayne L. Brinegar
Julene M. Bannon
Julene M. Bannon Notary Public.

