


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Pratt County. Sec. 28 Twp. 26 Rge. 13 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C NW NW SE
Lease Owner W. L. Kirkman, Inc.
Lease Name Johnson #1 Well No.
Office Address Pratt, Kansas 67124
Character of Well (Completed as Oil, Gas or Dry Hole)

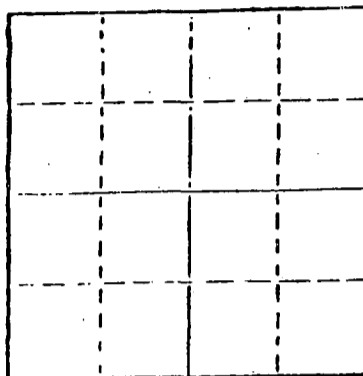

Locate well correctly on above
Section Plot

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7/30/80 19
Plugging completed 8/ 1/80 19
Reason for abandonment of well or producing formation
depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owen
Producing formation Depth to top Bottom Total Depth of Well 3235
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	412	none
				5 $\frac{1}{2}$ "	3214	2214'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 2600' and ran 5 sacks cement. Shot pipe at 2195', pulled 56 joints.
Squeezed hole with 15 sacks gel, 8 sacks hulls, 10 sacks gel. Released plug
and displaced with 125 sacks 50-50 poz, 4% gel and 3% cc.

PLUGGING COMPLETE.



(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of August, 1980

Margaret Melcher
Notary Public.

My commission expires



RECEIVED OCT 11 1979

KANSAS DRILLERS LOG

COMPANY W. L. Kirkman, Inc.

SEC. 28 T. 26 R. 12W

FARM Johnson NO. 1

LOC. C-NW NW SE

COUNTY Pratt

ROTARY TOTAL DEPTH 3,235'

COMM. September 20, 1979 COMP. September 27, 1979

CONTRACTOR H-30, Inc. (Rig #7)

ISSUED October 10, 1979

CASING

10 3/4"

8 5/8" Set at 412' cemented w/325 sxs cement

ELEVATION 1,906' GR.

5 1/2" Set at 3,214' cemented w/175 sxs cement

4 1/2"

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Shale	415'
Shale and Shells	810'
Shale	1,700'
Shale and Lime	1,788'
Lime and Shale	2,965'
Shale and Lime	3,076'
Lime	3,130'
Sand	3,136'
Lime and Shale	3,235'
Rotary Total Depth	3,235'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

RECEIVED
JUN 17 1980
6-17-80
CONSERVATION DIVISION
Wichita Kansas

State of Kansas }
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 10th day of October, 1979.

NOTARY
WILLISON

Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:
July 25, 1982