

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

NORTH



Locate well correctly on above
Section Plat

Pratt County, Sec 21 Twp 26S Rge (E) 12 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW 1/4 SW 1/4 SE 1/4
Lease Owner Bishop Oil Company
Lease Name Knop Well No 1
Office Address 901 Brown Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2-8 19 45
Application for plugging filed 7-9 19 45
Application for plugging approved 7-19 19 45
Plugging commenced 7-18 19 45
Plugging completed 7-24 19 45
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well H. W. Kerr?
Producing formation Arbuckle Depth to top 4351 Bottom Total Depth of Well 4426 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Clay-Sands-Shales & Red Salt Section	Water	0	1250	10 3/4	466	None
Broken Lime & Shale	Sand	1250	1765			
		1765	3698			
		3698	4020			
		4020	4133			
		4133	4285			
		4285	4351	5 1/2	4338	
		4351	Total Depth			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug back to 3733 ft. and run 8 sks. cement
Fill with mud and bridge solid @ 425 ft.
Run 20 sks. cement from 425 ft. to 375 ft.
Fill with mud from 375 ft. to 15 ft.
Run cement cap from 15 ft. to cellar base
Pull 3170 ft. of 5 1/2" cag., surface csg. left in well (cemented)

PLUGGING
FILE SEC 21 Twp 26S Rge 12
BOOK PAGE 19 LINE 40

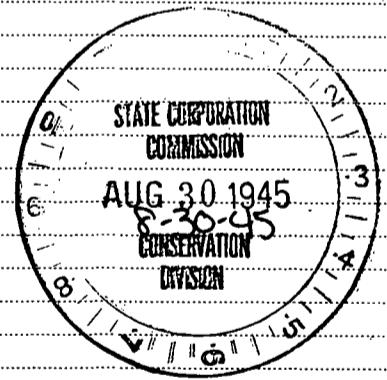

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Bishop Oil Company
Address 901 Brown Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
CARL TODD (employee of owner)

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Carl Todd

(Address)

SUBSCRIBED AND SWORN to before me this 29th day of August, 19 45

Sylvia M. Beckner
Notary Public.

My commission expires January 21, 1946

Knop Well No. 1

SW SW SE
Sec. 21-26S-12W
Pratt County, Kansas

Contractor: The R. W. Rine Drilling Company
Commenced: January 11, 1945

Completed: February 9, 1945

Clay & sand	0- 160	
Sand & shale	160-386	10 3/4" casing cemented @449'
Red Bed	386- 455	
Shale & lime	455- 991	
Red Bed & Shale	991-1295	
Shale & Lime	1295-1740	
Lime	1740-1797	
Lime & Shale	1797-1897	
Shale	1897-1955	
Lime & Shale	1955-2007	
Lime	2007-2045	
Lime & shale	2045-2195	
Lime	2195-2256	
Lime & Shale	2256-2342	
Lime	2342-2520	
Shale & Lime	2520-2795	
Shale & Shells	2795-2910	
Lime	2910-2957	
Lime & Shale	2957-3085	
Shale & shells	3085-3160	
Lime	3160-3193	
Shale & Lime	3193-3220	
Lime	3220-3348	
Lime & Shale	3348-3430	
Shale	3430-3480	
Lime & Shale	3480-3614	
Shale	3614-3667	
Lime & Shale	3667-3758	
Lime	3758-4179	
Shale & shells	4179-4198	
Lime & chert	4198-4217	
Lime	4217-4240	
Lime & Shale	4240-4263	
Lime & Shale	4263-4293	
Sand	4293-4300	
Sand & shale	4300-4321	
Lime & Shale	4321-4330	
Lime	4330-4336	
Shale	4336-4352	
Lime & Shale	4352-4360	
Lime	4360-4367	
Core	4367-4380	5 1/2" casing cemented @4338'
Lime	4380-4426	Total Depth 4426'



PLUGGING
FILE 21-26-120
BOOK PAGE 19-115 40

State of Kansas)
County of Barton) ss

I, Clyde W. Goddard, do hereby certify that the above is a true and complete log of the Knop Well No. 1, located in the SW of the SW of the SE of Section 21, Township 26S, Range 12W, in Pratt County, Kansas.

Clyde W. Goddard

Sworn to and subscribed before me this 14th day of February, 1945.

Henry L. Williams

My commission expires December 6, 1948