

15-151-0077-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

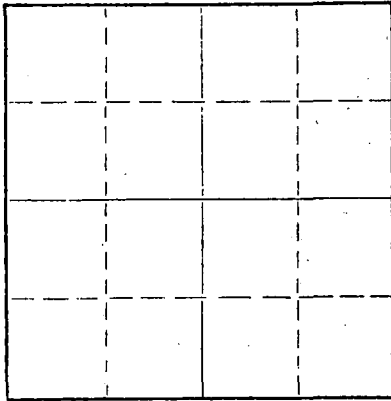

Locate well correctly on above
Section Plat

Pratt County. Sec. 22 Twp. 26S Rge. (E) 12 (W)
Location as "NE/CNW&SW" or footage from lines SE NE SW
Lease Owner James W. Hershberger
Lease Name Stead Well No. 1
Office Address 1039 First National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed August 21 19 61
Application for plugging filed August 21 19 61
Application for plugging approved August 21 19 61
Plugging commenced August 21 19 61
Plugging completed August 21 19 61
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred W. Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2460 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	264	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole was filled with heavy rotary mud from 2460 feet to 180 feet. Set plug with 1/4 sack of hulls and 15 sacks of cement through the drill pipe. Mudded hole to 35 feet, set plug with 1/4 sacks of hulls and 10 sacks of cement to cap. Bridged rat hole with 2 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

MAY 23 1963
5-23-63

WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Fortune Oil & Gas Company
Address 909 Central Bldg., Wichita, Kansas

STATE OF _____, COUNTY OF _____, ss. _____ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Hershberger
(Address) _____

SUBSCRIBED AND SWORN TO before me this 22 day of May, 1963

PARKINSON, W. B., Notary Public
My commission expires Jan. 7, 1964

Notary Public.

COPY

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


Company- JAMES HERSHBERGER
Farm- Stead No. 1

SEC. 22 T. 26 R. 12W
SE NE SW

Total Depth. 2460'
Comm. 8-14-61 Comp. 8-20-61
Shot or Treated.
Contractor. Fortune Oil & Gas, Inc.
Issued. 10-28-61

County Pratt

KANSAS



Elevation. 1911' KB

Production. Dry

Figures Indicate Bottom of Formations.

red rock & shale	1075
Anhydrite	1128
Anhydrite & shale	1500
shale & lime	1872
lime	1962
lime & shale	2460
Total Depth	

TOPS: ELECTRIC	
Herrington	1924
Winfield	1982
Doyle	2018
Towanda	2049
Fort Riley	2094
Wreford	2223
Council Grove	2276
Cottonwood	2431

RECEIVED
STATE CORPORATION COMMISSION

MAY 22 1963

5-22-63

CONSERVATION DIVISION
Wichita, Kansas