


5-151-20331-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Commission  
245 North Water  
Wichita, KS 67202

FORM CP-4

WELL PLUGGING RECORD

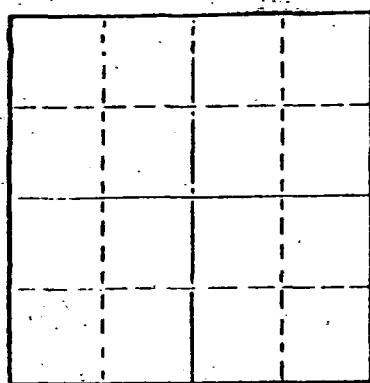

Locate well correctly on above  
Section Plat

Pratt County, Sec. 22 Twp. 26S Rge. 12W (E) NW  
Location as "NE/CNW/SW" or footage from lines C-SW SW  
Lease Owner W.L. Kirkman, INC.  
Lease Name Stead Well No. 1  
Office Address 434 North Market-Suite 110-Wichita, Ks. 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole  
Date well completed April 17, 1976  
Application for plugging filed verbal application 19  
Application for plugging approved verbal approval 19  
Plugging commenced April 17, 1976  
Plugging completed April 17, 1976  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G.R. Biberstein  
Producing formation Depth to top Bottom Total Depth of Well 1,972 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	284'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.  
Filled hole with heavy rotary mud from 1,972 feet (rotary total depth) to 250 feet. Set plug at 250 feet and cemented with 25 sxs cement. Filled hole with heavy rotary mud from 250 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 10 sxs cement, 2 sxs cement in rathole.

RECEIVED  
STATE CORPORATION COMMISSION

APR 30 1976

Name of Plugging Contractor H-30, INC. (If additional description is necessary, use BACK of this sheet)  
Address 200 North Main Wichita, Kansas 67202  
CONSERVATION DIVISION  
Wichita, Kansas


STATE OF Kansas COUNTY OF Sedgwick  
I, Will Dean Britting, Agent (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Will Dean Britting  
200 North Main Wichita, Ks. 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of April, 1976

My commission expires June 30, 1978

Elsie Willison  
Notary Public.



KANSAS GEOLOGICAL SOCIETY  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS

API 15-151-20,331-6000

COMPANY **W.L. Kirkman, INC.**

SEC. 22 T. 26S R. 12W

FARM **Stead**


NO. **1**

LOC. **C-SW SW**

TOTAL DEPTH **1,972'**  
 COMM. **April 14, 1976**  
 SHOT OR TREATED  
 CONTRACTOR **H-30, INC.**  
 ISSUED **April 28, 1976**

COMP. **April 17, 1976**

COUNTY **Pratt**  
 KANSAS



CASING

20	10	5/8" 284' cemented w/225 sxs cement	ELEVATION 1,913' KB
15	8		
12	6		
13	5		

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Surface Soil and Clay	50'
Sand	215'
Shale	1,860'
Lime and Shale	1,972'
Rotary Total Depth	1,972'


I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

*Dean Britting*  
 Dean Britting

State of Kansas }  
 County of Sedgwick } SS:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 28th day of April, 1976.



*Eisie Willison*  
 Eisie Willison-Notary Public

My Commission Expires:

June 30, 1978

RECEIVED  
 STATE CORPORATION COMMISSION

APR 30 1976  
 4-30-76  
 CONSERVATION DIVISION  
 Wichita, Kansas