

*B*

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO: 51-45

LOCATION C-NW-SE

SEC. 11 TWP. 27 RGE. 13-W

Dry Hole \_\_\_\_\_ Abandoned Oil Well X Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease M. Tuitseh

Operator The Atlantic Refining Co. Address Box #14 - Great Bend - Kansas

Field \_\_\_\_\_ County Pratt


Total Depth 4314 Feet.

(Describe briefly the manner in which the well was plugged)

Sucker Pipe 8 3/4 - 386 ft - Circulated with cement  
5 1/2" casing set at 4304 ft - Plugged back near bottom with  
Lau Wells Plug - sand & chert to 3916 ft - Dumped 5 sacks  
of cement at 3916 ft - Shot off & pulled 5 1/2" casing - Filled  
with mud to 248 ft - Set bridge & 15 sacks cement at 250 ft -  
Mud to 300 ft - Plug & 10 sacks of cement at the surface  
Patterson & Son - Pipe Pulling - Contractors

C. H. Stouck  
District Conservation Agent

Date 9 - 30 - 48

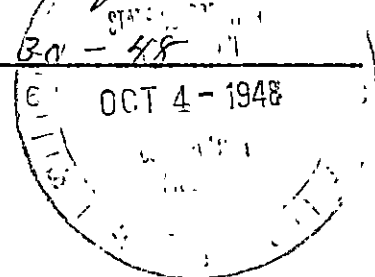

**PLUGGING**  
FILE SEC. 11 T 27 R 13a  
BOOK PAGE 5 LINE 45