
Form CP-3 Rev. 6-26-62

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

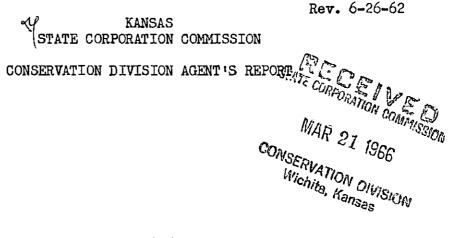

Operator's Full Name Samuel R. Gre	een, d/b/a Bul	ldog Pip	e & Supp	ly Company
Complete Address: P. O. Box 1153	, Tulsa, Oklah	oma		
Lease Name Runyan	W	Well No	# :	2
Location C E/2 NE NE	Sec. 11	Twp. 27	Rge. 13	(E)(W)W
County Pratt	Total	Depth	429	5 '
Abandoned Oil Well X Gas Well	Input Well	SWD Well_	A & C	
Other well as hereafter indicated:		• • · · · · · · · · · · · · · · · · · ·		
Plugging Contractor: Bert Self Cas:	ing Pulling Co	ompany		
Address: Route 4, Hutchinson, Ka	nsas	Li	cense No	48
Operation Completed: Hour 2:30 PMDay	16th Mo nt h	March	Year	1966
The Above well was plugged as follows:				
360' of 10 3/4" surface pipe, c	ement circulat	ed. 4284	' of 5½"	long string
top of cement 3347'. Bottom of	the hole was s	anded to	33001,	and cemented
with 5 sacks. 3229' of $5\frac{1}{2}$ " long	string was re	ecovered	from the	hole. Bridge
plug was pushed in fluid to 300	', rock bridge	e from 30	0' to 270	o', 5 sacks
of cement was mixed in a barrel	and put on pl	lug at 27	O', thro	agh the dump
bailed, and let set over-night.	Next day hole	was bai	led dry,	and filled
with 4 yards of ready-mix cemen	t to the base	of the c	ellar.	
				
I hereby certify that the above well was INVOICED DATE 3/21/66 INV. NO. 2901-W		gned: Au	Plugging	Elevina