


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County. Sec. 8 Twp. 27S Rge. (E) 13(W)  
Location as "NE/CNW/SW" or footage from lines Center SE/4 SE/4 SE/4  
Lease Owner Lion Oil Company  
Lease Name Airport Well No. 1  
Office Address P. O. Box 639, Pratt, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 8-24 19 52  
Application for plugging filed 8-24 19 52  
Application for plugging approved 8-24 19 52  
Plugging commenced 8-24 19 52  
Plugging completed 8-24 19 52  
Reason for abandonment of well or producing formation Dry Hole



Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4545 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	834'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set bottom plug @ 300' with 30 sacks of cement and 1/2 sack of hulls. Set top plug @ 30' with 10 sacks of cement. Heavy mud between plugs. Plugging completed.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor R. W. Rine Drilling Company  
Address 30 Central Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF PRATT, ss.  
Joe Costello (employee of owner) ~~and owner~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe Costello  
P. O. Box 639, Pratt, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of September, 19 52

My commission expires August 29, 1955 Notary Public: Van Doush

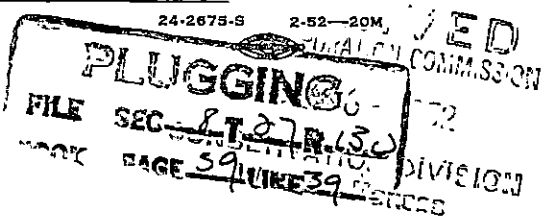

SE SE SE  
SEC. 8-27S-13W  
PRATT COUNTY, KANSAS

AIRPORT WELL NO. 1

CONTRACTOR: THE R. W. RINE DRILLING COMPANY  
STARTED: JULY 29, 1952

FINISHED: AUGUST 24, 1952

LOG

SAND AND CLAY	0 - 200	
RED BED AND SHELLS	200 - 470	8-5/8" Csg. @ 834' w/550 SX. & 600# C.C.
SHALE AND SHELLS	470 - 840	SYFO @ 500' - OK
SHALE AND SHELLS	840 - 1130	SYFO @ 1000' - 1/2"
SHALE AND SHELLS	1130 - 1590	
SHALE AND SHELLS	1590 - 1820	SYFO @ 1630' - 1"
LIME AND SHALE	1820 - 1980	
LIME	1980 - 2345	SYFO @ 2000' - 1/2"
LIME AND SHALE	2345 - 2735	SYFO @ 2500' - 1"
LIME AND SHALE	2735 - 2830	
SHALE	2830 - 2980	
SHALE AND LIME	2980 - 3430	SYFO @ 3000' - 1/2"
LIME	3430 - 3670	SYFO @ 3500' - 1/2"
LIME AND SHALE	3670 - 3780	
LIME	3780 - 4235	
LIME, SAND AND CHERT	4235 - 4262	
LIME AND CHERT	4262 - 4310	
LIME	4310 - 4312	
CHERT AND LIME	4312 - 4332	
CHERT AND SHALE	4332 - 4350	
LIME	4350 - 4375	
CHERT AND LIME	4375 - 4410	
SAND AND SHALE	4410 - 4510	
SHALE AND CHERT	4510 - 4545	

D & A - AUG. 24 - 1952  
R.T.D. - BOTTON PLUG @ 300' w/30 SX. CEM.  
& 1/2 SX. HULLS  
TOP PLUG @ 30' w/10 SX. CEMENT  
HEAVY MUD BETWEEN PLUGS.

STATE OF KANSAS )  
COUNTY OF SEDGWICK ) ss.

I, R. M. GREEN, DO HEREBY CERTIFY THAT THE ABOVE IS A TRUE AND ACCURATE LOG OF THE AIRPORT WELL NO. 1, LOCATED SE SE SE, SEC. 8-27S-13W, PRATT COUNTY, KANSAS.

*R.M. Green*  
ASSISTANT SECRETARY

SUBSCRIBED TO AND SWORN BEFORE ME THIS 4TH DAY OF SEPTEMBER, 1952.

*Meddie Pisher*  
NOTARY PUBLIC

MY COMMISSION EXPIRES MARCH 2, 1953.

RECEIVED  
CORPORATION COMMISSION  
SEP 6 - 1952  
CONSERVATION DIVISION  
Wichita, Kansas

PLUGGING  
WELL SEC. 8 T. 27 R. 13 W  
PAGE 39 LINE 39