


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County. Sec. 9 Twp. 29 Rge. 12 (E) (W)
Location as "NE/CNW&SW" or footage from lines NW NW SW

Lease Owner Icer Addis
Lease Name Grimes Well No. 1
Office Address Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D. & A.
Date well completed October 17 1962
Application for plugging filed October 17 1962
Application for plugging approved October 17 1962
Plugging commenced October 17 1962
Plugging completed October 17 1962
Reason for abandonment of well or producing formation -0-

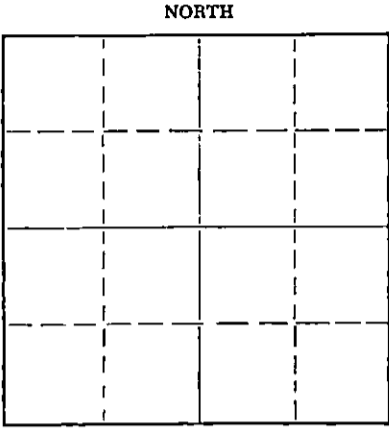

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production -0- 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Herman Justus
Producing formation -0- Depth to top -0- Bottom -0- Total Depth of Well 4387' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	327'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Rotary mud was used to fill up hole to a depth of 250' where 1st plug was set using 20 sacks cement, 2nd plug was set at a depth of 40' using 10 sacks cement and filling hole to top.

RECEIVED
STATE CORPORATION COMMISSION
NOV 1 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor L. J. DREILING AND SONS, INC.
Address VICTORIA, KANSAS

STATE OF KANSAS, COUNTY OF ELLIS, ss.
I, Leo F. Dreiling the contractor (Contractor or Owner or Operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leo F. Dreiling
Victoria, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24th day of October, 1962

Herman Zimmerman
Notary Public.

My commission expires August 14, 1965



L. J. DREILING and SONS, Inc.
VICTORIA, KANSAS

WELL LOG

Company Icer Addis
Box 519, Great Bend, Kansas
Farm Grimes No. 1
Total Depth 4387'
Comm. 10-5-62 Comp. 10-17-62

Sec. 9 Twp. ²⁷ 12^W Rng. ²⁷ 27^W
Location NW NW SW
County Pratt County, Kansas
Elevation: D. F. 1848'

Contractor L. J. DREILING & SONS, INC.
VICTORIA, KANSAS

G. R.

Casing Record	Cement Record	Production:
8 5/8" - - - - 327'	300 sacks cement	D. & A.

Figures Indicate Bottom of Formations

0 - 50	Surface Clay
50 - 327	Red Rock & Sand
327 - 1035	Red Rock & Sand
1035 - 1752	Shale & Shells
1752 - 2040	Shale & Shells
2040 - 2285	Shale
2285 - 2485	Shale & Lime
2485 - 2975	Lime & Shale
2975 - 3175	Shale & Lime Streaks
3175 - 3220	Lime & Shale
3220 - 3396	Lime & Shale
3396 - 3535	Lime & Shale
3535 - 3560	Lime
3560 - 3698	Lime
3698 - 3758	Lime
3758 - 3777	Lime
3777 - 3946	Lime
3946 - 4010	Lime
4010 - 4119	Lime & Shale
4119 - 4146	Chirt.
4146 - 4178	Lime & Shale
4178 - 4195	Shale & Chirt.
4195 - 4221	Lime & Shale
4221 - 4241	Shale & Lime Streaks
4241 - 4282	Lime & Shale
4282 - 4340	Lime & Shale
4340 - 4356	Lime & Shale & Chirt.
4356 - 4387	Lime & Shale & Sand
4387	TD

RECEIVED
STATE CORPORATION COMMISSION
NOV 1 1962
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) ss.
COUNTY OF ELLIS)

I, Leo F. Dreiling, of the L. J. Dreiling and Sons, Inc., upon oath states that the above and foregoing is a true and correct copy from the daily Drilling Report from your Grimes No. 1.

Leo F. Dreiling

LEO F. DREILING

Subscribed and sworn to before me this 24th day of October, 1962

Roman Zimmerman

NOTARY PUBLIC

My Commission Expires: August 14, 1965