


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely.  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Pratt County, Sec. 32 Twp. 27 Rge. 12 E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
SE NW NE  
Lease Owner D. R. Lauck Oil Co., Inc.  
Lease Name Stull #1 Well No.  
Office Address Ellinwood, Kansas 67526  
Character of Well (Completed as Oil, Gas or Dry Hole)

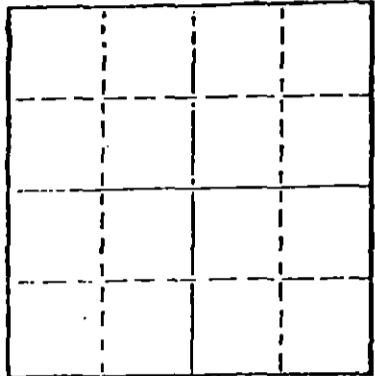

Locate well correctly on above Section Plat

Date Well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 3/6/78 19  
Plugging completed 3/14/78 19  
Reason for abandonment of well or producing formation depleted.  
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owens  
Producing formation Depth to top Bottom Total Depth of Well 4441  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
STAT -				8-5/8	358	none
MAR 17 1978				5 1/2"	4241'	3414'
CONSERVATION DIVISION Wichita, Kansas						

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed wood plug to 3700' and sanded to 3675', ran 5 sacks cement. Loaded hole with 30 barrels salt water, shot pipe at 3406', wouldn't come loose. Spotted oil. Pumped 50 barrels of oil. Worked pipe loose at 3406' and pulled 107 joints. Allied pumped 3 sacks hulls, 25 sacks gel, released plug and pumped 125 sacks common cement, 2% gel and 3% cc.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.  
R. DARRELL KELSO (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
CHASE, KANSAS  
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of March, 1978

My commission expires



Margaret Melcher  
Notary Public.

D. R. Lauck Oil Company, Inc. - Stull #1  
SE NW NE Sec. 32-27S-12W  
Pratt County, Kansas

Contractor: D. R. Lauck Oil Company, Inc.  
301 S. Broadway  
Wichita, Kansas 67202

Commenced: October 27, 1977  
Completed: November 10, 1977

Drillers Log

Clay	35
Sand	130
Red Bed	361
Red Bed & Shale	1060
Shale & Shells	1797
Shale	1985
Shale & Shells	2515
Shale & Sand	2740
Shale & Shells	3150
Shale & Lime	3380
Shale & Shells	3590
Shale & Lime	3870
Lime	4060
Lime & Shale	4160
Lime	4375
Shale & Lime	4397
Lime	4440 RTD

RECEIVED  
STATE CORPORATION COMMISSION

FEB 01 1978

CONSERVATION DIVISION  
Wichita, Kansas