

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-063-21205-00-00
Spot: SWNWSE Sec/Twnshp/Rge: 8-11S-31W
1650 feet from S Section Line, 2310 feet from E Section Line
Lease Name: WIELAND B Well #: 1
County: GOVE Total Vertical Depth: 4692 feet

Operator License No.: 3273
Op Name: HERMAN L. LOEB, LLC
Address: PO BOX 838
LAWRENCEVILLE, IL 62439

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4691		200 SX
SURF	8.625	224		145 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 10/22/2014 11:00 AM
Plug Co. License No.: 33990 Plug Co. Name: CODELL WELL SERVICE, LLC
Proposal Rcvd. from: SHANE PELTON Company: CODELL WELL SERVICE, LLC Phone: (719) 340-8987

Proposed Plugging Method: Ordered 500 sx 60/40 pozmix 4% gel cement w/600 # hulls.
Port collar at 2530' w/325 sx cement.
Perforations: 4214' - 4637'

Plugging Proposal Received By: DARREL DIPMAN Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 10/22/2014 4:15 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Ran tubing to 4483' and pumped 100 sx cement w/200 # hulls. Pulled tubing to 3480' and pumped 100 sx cement w/100 # hulls. Pulled tubing to 1285' and pumped 75 sx cement. Good circulation of cement. Tied on to backside and squeezed with 25 sx cement. Shut in pressure 350 psi. Pulled tubing out. Topped off casing with 20 sx cement full.

GPS: 39.10920 -100.78381

Perfs:

Top	Bot	Thru	Comments
4268	4637		
4214	4218		

Received
KANSAS CORPORATION COMMISSION

OCT 30 2014

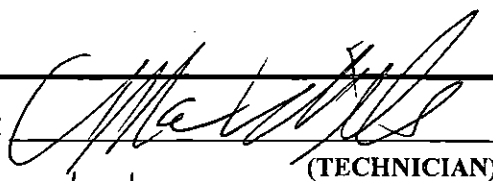
CONSERVATION DIVISION
WICHITA, KS

Remarks: ALLIED CEMENT TICKET # 64334

Plugged through: TBG

District: 04

Signed


(TECHNICIAN)

11/12/14 CPM

CM

OCT 24 2014