

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-095-00661-00-00
Spot: SESW Sec/Twnshp/Rge: 29-30S-9W
660 feet from S Section Line, 3300 feet from E Section Line
Lease Name: M JACOBS Well #: 1
County: KINGMAN Total Vertical Depth: 4440 feet

Operator License No.: 31191
Op Name: R & B OIL & GAS, INC.
Address: 124 N MAIN PO BOX 195
ATTICA, KS 67009

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	4439		150 SX
SURF	8.625	295		300 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 11/10/2014 4:00 PM
Plug Co. License No.: 30346 Plug Co. Name: SHAWNEE WELL SERVICE, INC.
Proposal Rcvd. from: JEFF CAPPS Company: SHAWNEE WELL SERVICE Phone: _____

Proposed Plugging Method: CIBP 4300' & 2 SXS. 1600' - 50 SXS. 1100' 50 SXS. 350'-0'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 11/10/2014 4:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

A CIBP WAS SET AT 4300' & CAPPED WITH 2 SXS CEMENT. 4 HOLES WERE PERFERED AT 1600'. PUMPED 50 SXS CEMENT OUT PERFS. TAGGED AT 1150'. PERF 4 HOLES AT 1100', PUMPED 50 SXS CEMENT. TAGGED CEMENT 810'. PERF'D 4 HOLES AT 350' & CIRC CEMENT TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
4338	4366		

Remarks: ALLIED CEMENT, COMMON CEMENT 3% CACL.

Plugged through: CSG

District: 02

Signed _____

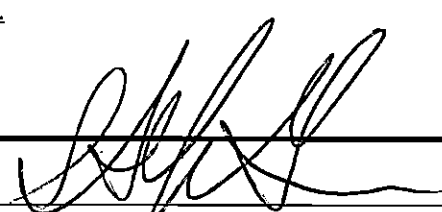

(TECHNICIAN)

Received
KANSAS CORPORATION COMMISSION

NOV 17 2014

CONSERVATION DIVISION
WICHITA, KS

11-25-14 C10M