


15-009-20918-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

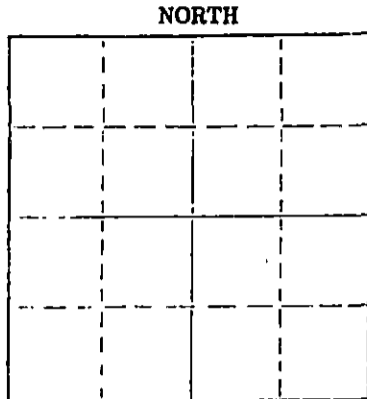

Locate well correctly on above  
Section Plat

Barton County. Sec 22 Twp. 17 Rge. 15 (E) X (W)  
Location as "NE/CNW4SW4" or footage from lines SE NW SE  
Lease Owner Hummon and Repofgel  
Lease Name MENZER Well No. 1  
Office Address 860 Sutton Place, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed July 11 19 75  
Application for plugging filed July 11 19 75  
Application for plugging approved July 11 19 75  
Plugging commenced July 11 19 75  
Plugging completed July 11 19 75  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3600 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<u>8 5/8</u>	<u>332</u>	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Set plug @ 550' w/40 sacks cement thru drill pipe.  
Come up hole to 240' - set plug w/25 sacks cement thru drill pipe.  
Top plug set @ 40' w/1/2 sack hulls and 10 sacks cement.  
2 sacks cement in rat hole.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor DUKE DRILLING CO.  
Address Box 823, Great Bend, Kansas

STATE OF KANSAS COUNTY OF BARTON  
Wayne Dobbs (employee of owner) or (~~operator~~) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wayne Dobbs  
P. O. Box 823, Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of July, 19 75

My commission expires April 11, 1978  
Dorothy M. Hague Notary Public.

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 15 1975  
CONSERVATION DIVISION  
Wichita, Kansas

15-009-20918-00-00

DRILLERS' WELL LOG

DATE COMMENCED: July 1, 1975  
DATE COMPLETED: July 10, 1975

Hannon & Repofgel  
MEZNER # 1  
SE NW SE of Sec 22-T17-R15W  
Barton County, Kansas

ELEVATION: 1982 K.B.

FORMATION TOPS

0 - 40'	Post Rock
40 - 190'	Shale
190 - 200'	Sand and Shells
200 - 300'	Shale and Shells
300 - 490'	Shale and Sand Streaks
490 - 510'	Sand
510 - 716'	Shale and Sand Streaks
716 - 1018'	Red Bed and Shale
1018 - 1045'	Anhydrite
1045 - 1450'	Shale
1450 - 2980'	Lime and Shale
2980 - 3206'	Lime
3206 - 3210'	Shale
3210 - 3498'	Lime
3498 - 3508'	Lime and Shale
3508 - 3572'	Shale, Lime, Chert and Sand
3572 - 3600'	Dolomite
3600'	RTD

Anhydrite	1018
Topeka	2970
Heebner	3206
Tornoto	3222
Lansing K.C.	3270
Base K.C.	3498
Conglomerate	3508
Arbuckle	3572
RTD	3600

SURFACE PIPE:

Set 332' of used 8 5/8",  
2 3/4" pipe w/190 sacks Common,  
2% Gel, 3% cc.

AFFIDAVIT

STATE OF KANSAS }  
COUNTY OF BARTON } ss.

Wayne Dobbs, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

*Wayne Dobbs*

Subscribed and sworn to before me this 14th day of July, 1975.

*Dorothy M. Hague*  
Notary Public

My Commission Expires: April 11, 1978

RECEIVED  
STATE CORPORATION COMMISSION

JUL 15 1975

CONSERVATION DIVISION  
Wichita, Kansas