


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

15-188-19146-0080

WELL PLUGGING RECORD

NORTH

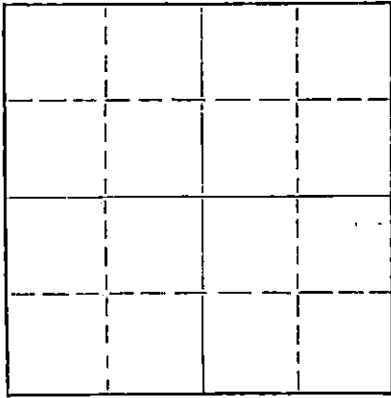

Locate well correctly on above  
Section Plat

Stafford County. Sec. 26 Twp. 22 Rg. 14 (E) XXW  
Location as "NE/CNW&SW" or footage from lines. SE SW NE  
Lease Owner Morganstern & Spector  
Lease Name Dohkman Well No. 2  
Office Address Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed 9-7-56 1956  
Application for plugging filed May 12, 1959 1959  
Application for plugging approved May 13, 1959 1959  
Plugging commenced 5/29/59 1959  
Plugging completed 5/31/59 1959  
Reason for abandonment of well or producing formation failure to produce  
profitably  
If a producing well is abandoned, date of last production May 1959  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot  
Producing formation Kansas City Depth to top 3461 Bottom 3809 Total Depth of Well 3840' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" O.D.	222'	none
				4 1/2" O.D.	3720'	2770 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plugged back to 3250 ft. with sand. Dumped 5 sacks cement.  
Set rock bridge at 250 ft. Dumped 20 sacks cement mudded hole to 40 ft.  
Dumped 10 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 20 1959  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor E & L Casing Pulling Co.  
Address 1416 Coolidge, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.  
Morganstern & Spector (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

SUBSCRIBED AND SWORN TO before me this 6 day of June, 1959  
[Signature] (Address)

My Commission Expires Apr. 14, 1963

Notary Public.

PLUGGING  
FILE SEC. 26 T. 22 R. 14w  
BOOK PAGE 38 LINE 5

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


COPY

Company: SIERRA PETRO. CO., INC.  
Farm: Dohrman No. 2

SEC. 26 T. 22 R. 11W  
SE SW NE

Total Depth. 3840'  
Comm. 8-26-56 Comp. 9-7-56  
Shot or Treated.  
Contractor.  
Issued. 2-2-57

County: Stafford  
KANSAS



CASING:  
8 5/8" 222'  
4 1/2" 3720'

Elevation. 1937' KB

Production. 15 BOPD

Figures indicate Bottom of Formations

sand	223
shale	290
sand	360
shale-red bed	818
anhydrite	853
shale-shells	1200
shale-lime	3250
lime	3332
lime-shale	3448
lime	3809
lime-shale	3840
Total Depth	

TOPS:	
Anhydrite	813
Heebner	3318
Brown lime	3448
Kansas City	3461

PLUGGING  
FILE SEC. 26 T. 22 R. 11W  
BOOK PAGE 38 LINE 5