


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County. Sec. 23 Twp. 27S Rge. 13W (W)
Location as "NE/CNW/SW" or footage from lines. C NE NW

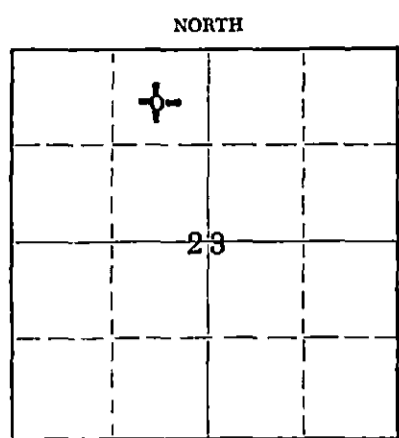

Locate well correctly on above Section Plat

Lease Owner Richard L. Bohanon
Lease Name Rolf Well No. 1
Office Address 1405 Liberty Bank, Oklahoma City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 26, 1964
Application for plugging filed November 26, 1964
Application for plugging approved November 26, 1964
Plugging commenced November 26, 1964
Plugging completed November 26, 1964
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4525 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0'	301'	8-5/8"	301'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4525'-240' Mud
240'-236' Plug
236'-196' Cement, 25 sacks
196'-40' Mud
40'-36' Plug
36'-6' Cement, 10 sacks (Bottom of Cellar)

RECEIVED
STATE CORPORATION COMMISSION

DEC 21 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sun Cementing Co.
Address Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
John H. Knightley (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. (So help me God.)

(Signature) John H. Knightley
301 S. Broadway, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of December, 1964

Stella J. Lipja
Notary Public.

My commission expires March 12, 1967

Richard L. Bohanon

Rolf #1

C NE NW Sec. 23-27S-13W
Pratt County, Kansas

Commenced: November 9, 1964
Completed: November 26, 1964

Rotary Drilling Contractor: Lauck Drilling Company, Incorporated.

Casing Record: 301' 8-5/8" Cemented with 225 sacks Cement,
4 sacks Calcium Chloride.

Elevation: 1931 GL; 1934 DF; 1936 KB.

Drillers Log

Clay	30
Red Bed & Sand	680
Sand	773
Sand & Shale	833
Sand	1023
Shale & Sand	1148
Shale, Shells & Red Bed	1250
Shale, Shells & Sand	1840
Lime & Shale	2015
Lime, Shells & Shale	2190
Shale & Lime	2328
Lime & Shale	2565
Shale & Lime	3452
Lime & Shale	3720
Shale & Lime	3810
Lime & Shale	3858
Lime	3981
Lime & Shale	4049
Shale & Lime	4109
Lime & Shale	4250
Lime, Shale & Chert	4294
Lime & Chert	4345
Chert & Lime	4385
Lime, Chert & Sand	4426
Sand & Shale	4452
Shale & Sand	4500
Shale	4525 RTD

RECEIVED
STATE CORPORATION COMMISSION

DEC 21 1964

CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that this is a true and correct
log of the above mentioned well, to the best
of my knowledge and belief.

John A. Knightley
Subscribed and sworn to before me this

17th day of December, 1964

Stella J. Lipp
Notary Public

My commission expires 3-12-67