


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

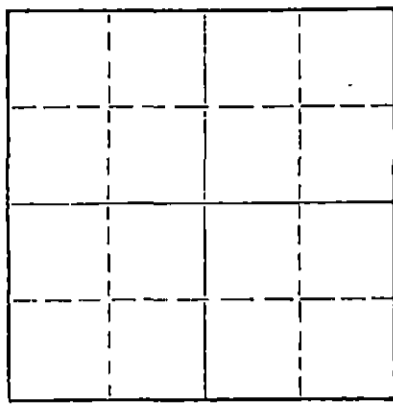

Locate well correctly on above  
Section Plat

Pratt County, Sec. 22 Twp. 27S Rge. (E)14 (W)  
Location as "NE/CNWxSWx" or footage from lines C NW SW  
Lease Owner Nadel & Gussman  
Lease Name Reed Well No. 1  
Office Address 1714 First Natl. Bldg., Tulsa, Okla. 74103  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed May 10, 19 70  
Application for plugging filed May 13, 19 70  
Application for plugging approved (by phone) May 10, 19 70  
Plugging commenced May 10, 19 70  
Plugging completed May 10, 19 70  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4690 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	352'	8-5/8"	352'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 300'. Set first plug @ 300' w/25 sx. cement. Filled hole with heavy mud to 40'. Set second plug @ 40' w/10 sx. cement. Plugged rat hole w/2 sx. cement. Job complete @ 12:30 PM.




(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.  
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
James S. Sutton II (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James S. Sutton II  
830 Sutton Place, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 13 day of May, 19 70



Barbara J. Layton  
Barbara J. Layton Notary Public.

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG


REED #1  
C NW SW Section 22-27S-14W  
Pratt County, Kansas

Commenced: April 28, 1970  
Completed: May 10, 1970

OPERATOR - Nadel & Gussman, 1714 First National Bldg., Tulsa, Oklahoma 74103

DEPTH		FORMATION	REMARKS
From	To		
0	215	Sand	
215	400	Clay and red bed	Ran 12 joints of 8-5/8" casing, set @ 352' w/280 sacks cement.
400	1209	Red bed	
1209	1870	Red bed and shale	
1870	3974	Shale and lime	
3974	4208	Lime	
4208	4295	Lime and shale	
4295	4452	Lime	
4452	4543	Lime and chert	
4543	4625	Simpson shale and sand	
4625	4690	Simpson and Arbuckle	
4690	TD		Dry and abandoned.

I, JAMES S. SUTTON II, certify this is a correct copy of the Drillers' Log for the well drilled in the C NW SW Section 22-27S-14W, Pratt County, Kansas, to the best of my knowledge and belief.

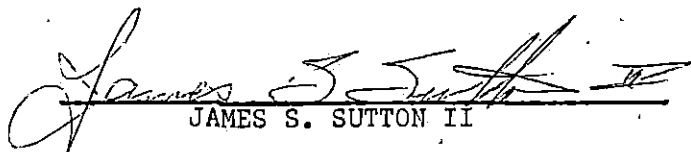
  
JAMES S. SUTTON II

STATE OF KANSAS            )  
                                  ) SS  
COUNTY OF SEDGWICK    )

Before me, the undersigned, a Notary Public within and for said County and State, on this 13 day of May, 1970, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires February 1, 1972

  
Barbara J. Layton, Notary Public

