

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

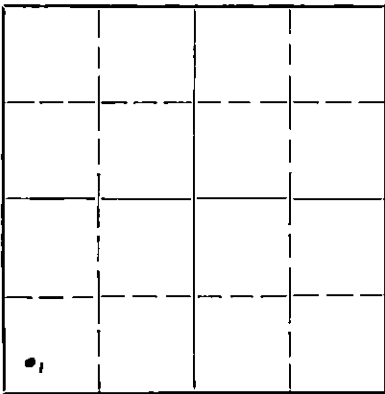

Locate well correctly on above
Section Plat

Pratt County, Sec. 24 Twp. 27 Rge. (E) 13 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines 330' E. & 430' N. of SW Cor.
Lease Owner Cities Service Oil Company
Lease Name McGuire Well No. 1
Office Address Bartlesville, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 21, 19 43
Application for plugging filed August 21, 19 43
Application for plugging approved August 21, 19 43
Plugging commenced August 22, 19 43
Plugging completed August 23, 19 43
Reason for abandonment of well or producing formation No productive formation encountered.

If a producing well is abandoned, date of last production ---- 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. T. Alexander
Producing formation Arbuckle Depth to top 4431 Bottom 4461 Total Depth of Well 4461 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>Arbuckle</u>	<u>Water</u>	<u>4431</u>	<u>4461</u>	<u>8-5/8"</u>	<u>668'</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Circulated heavy rotary mud 4461 to 615 ft. Set bridge and cemented with 15 sacks 565 ft. Mudded to 26 ft. Cemented with 10 sacks, 26 ft. to surface. Welded steel cap on surface pipe.



(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to R. C. Hauber
Address Box 751
Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, SS.
J. A. Deffeyes (employee of owner) of ~~the~~ of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Box 751, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 4th day of September, 19 43.

My commission expires March 12, 1947.

[Signature]
Notary Public.

WELL RECORD

Company Cities Service Oil Co. Well No. 1 Farm McGuire
 Location 430' North and 330' East of SW Corner Sec. 24 T. 27 R. 13W
 Elevation 1907 County Pratt State Kansas
 Drlg. Comm. July 29, 1943 Contractor Corbett-Barbour Drilling Company
 Drlg. Comp. August 28, 1943 Acid None
 T. D. 4461 Initial Prod. Dry - Plugged and Abandoned

CASING RECORD:

8-5/8" @ 668' cem. 250 ex cement

FORMATION RECORD:

soil & sand	0-40
sand & red bed	535
red bed & shells	668
shale & shells	802
red rock	985
shale & salt	1240
salt & sand	1760
lime	1940
shale & shells	2105
shale & lime	2370
lime & shale	2520
shale & lime	2645
lime & shale	2975
lime	3035
lime & shale	3705
shale & lime	3845
lime	4225
lime & chert	4245
lime cherty	4285
chert & lime	4305
chert	4330
lime & shale	4366
lime	4376
sand	4378
sand & shale	4387
lime & shale	4430
lime	4461 T. D.

Top Arbuckle
 Penetration
 Total Depth

4431'
 30'
 4461'

Syfo: 500' 00
 1000' 00
 1500' 00
 2500' 00
 3500' 00

PLUGGING
 FILE SEC-24 L7 R13W
 BOOK PAGE-89 LINE-35

