


9

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County, Sec. 24 Twp. 27 Rge. (E) 13(W)
Location as "NE/CNW*SW*" or footage from lines NE NE NE
Lease Owner The Bovaird Supply Company
Lease Name McGuire "D" Well No. 1
Office Address Box 48, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed May 10 1968
Application for plugging approved _____ 19____
Plugging commenced June 29 1968
Plugging completed July 5 1968
Reason for abandonment of well or producing formation depleted

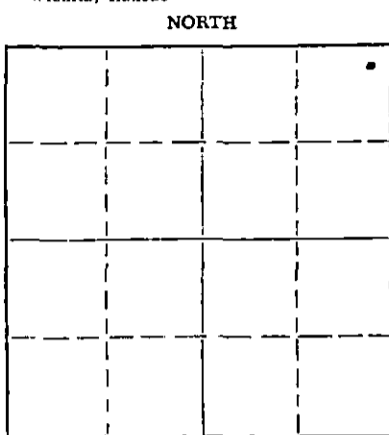

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4442 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	425'	8 5/8"	425'	none
		0	4437 3/4'	5 1/2"	4437 1/2'	3188.17

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded back to 4200' and dumped 5 sacks cement.

Bailed hole down to 390', set 10' rock bridge and dumped 25 sacks cement. Filled hole with mud to 40', set 10' rock bridge and capped hole with 10 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pipe Pullers, Inc.
Address Box 486, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Evelyn Roth (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth
Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 15th day of July, 1968

My commission expires Feb. 10, 1971
George A. Meyer Notary Public.

DRILLERS LOG

McGuire "D" #1

Loc: ME NE NE
 Sec: 24-27-13W
 Pratt County, Kansas
 Operator: Cooperative Refinery Association
 Contractor: Company Rig #5

Elevation: 1904 D.F.
 Casing: 8 5/8" @ 425 w/ 500 ex.

5 1/2" @ 437 1/2 w/ 100 ex.

Comm: 5-12-53 Comp: 2-18-53
 Total Depth: 4433'

From	To	Formation
0	150	Sand
150	425	Red Bed, Shale & Shells
425	740	Surface clay, sand & shale
740	1295	Shale, shells, salt
1295	1700	Shale, Shells
1700	1725	Shale & Shells
1725	2265	Lime
2265	2650	Lime & Shale
2650	2895	Shale & Shells
2895	3110	Lime & Shale
3110	3580	Lime
3580	3790	Lime & Shale
3790	4080	Lime
4080	4120	Lime & Shale
4120	4150	Lime
4150	4173	Lime, Chert
4173	4227	Chert, Lime, Shale
4227	4287	Chert, Lime
4287	4322	Chert, Shale, Sand
4322	4340	Sand, Chert
4340	4360	Sand
4360	4380	Sand, Shale
4380	4433	Lime, Shale
4433	4442	Lime
4442		R.T.D.

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 13 1968
 CONSERVATION DIVISION
 Wichita, Kansas

(STATE OF KANSAS)
 (COUNTY OF BARTON)

I hereby certify that the above is a true and correct copy of the log on the McGuire "D" #1 well, located NE NE NE of Section 24-27-13W, Pratt County, Kansas.

P. H. Jackson

Subscribed and sworn to before me this 9 day of May 1953.

Elyse E. Erickson

My commission expires: 4-20-57