


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Pratt County. Sec. 8 Twp. 27S Rge. 15W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C NE/4 SE/4

Lease Owner Imperial Oil Company
Lease Name Miller Well No. 1-8
Office Address 720 4th Financial Center, Wichita, Ks. 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

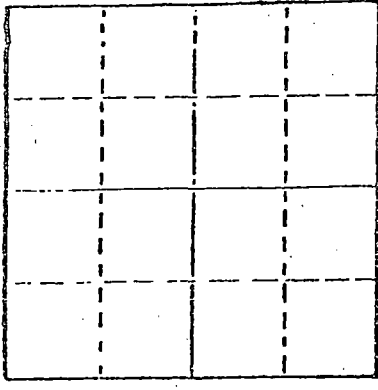

Locate well correctly on above
Section Plot

D & A
Date Well completed June 6, 1977
Application for plugging filed June 6, 1977
Application for plugging approved June 6, 1977
Plugging commenced June 6, 1977
Plugging completed June 6, 1977
Reason for abandonment of well or producing formation
D & A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. H. Metz
Producing formation Depth to top Bottom Total Depth of Well 4,540'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	396.53'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged hole @ 420' w/35 sx cement
40' w/12 sx cement
5 sx cement in rathole

RECEIVED
STATE CORPORATION COMMISSION
JUN 14 1977
Red
06-14-77
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Red Tiger Drilling Company
1720 KSB&T Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss. contractor
Gloria Fawcett (employee of ~~xxxxxx~~)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gloria Fawcett
1720 KSB&T Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of June, 1977.



Dann Drennan
Notary Public.

My commission expires

DRILLERS LOG

No. 1-8 Miller

CASING RECORD:

8 5/8" @ 404'
w/300 sx cement

COMPANY: Imperial Oil Company

CONTRACTOR: Red Tiger Drilling Company

COMMENCED: May 25, 1977

COMPLETED: June 6, 1977

DESCRIPTION:

C NE/4 SE/4
Sec. 8-T27S-R15W
Pratt County, Kansas

TOTAL DEPTH: 4,540'

ELEVATION: 2,060' KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand & Shale	0	420	
Shale	420	1047	
Anhydrite	1047	1059	
Shale	1059	2095	
Lime & Shale	2095	2225	
Shale	2225	2430	
Shale & Lime	2430	2620	
Lime	2620	3160	
Lime & Shale	3160	3450	
Lime	3450	4540	
RTD		4540	


I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 9th day of June, 1977.

D'Ann Drennan
Notary Public



RECEIVED
STATE CONSERVATION COMMISSION
JUN 14 1977
CONSERVATION DIVISION
Wichita, Kansas