


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Meade County, Sec. 9 Twp. 32S Rge. 27 ~~EE~~/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SW SE

Lease Owner IREX Corporation
Lease Name Bergkamp Well No. #1
Office Address 1670 Broadway - Suite 3301, Denver, CO 80202
Character of Well (Completed as Oil, Gas or Dry Hole)
Dry Hole

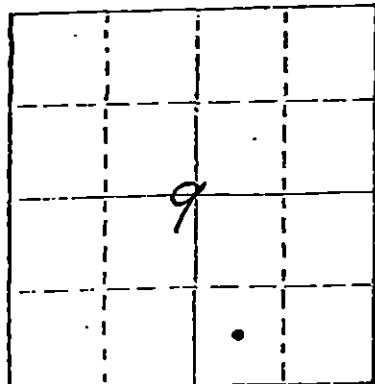

Locate well correctly on above
Section Plat

Date Well completed 1-27-83 19
Application for plugging filed 1-26-83 19
Application for plugging approved 1-26-83 19
Plugging commenced 1-26-83 19
Plugging completed 1-27-83 19

Reason for abandonment of well or producing formation
Commercial quantities of oil not found
If a producing well is abandoned, date of last production
19.

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Paul Luthi
Producing formation Depth to top Bottom Total Depth of Well 6000'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	1515'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

- Plug @ 1560' w/70 sx.
- Plug @ 680' w/35 sx.
- Plug @ 40' w/10 sx.
- Rat Hole 10 sx.
- Mouse Hole 10 sx.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Co., Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
Wilson Rains, President of Rains & Williamson Oil Co. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Wilson Rains
435 Page Court, 220 W. Douglas, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 28 day of January, 1983

My commission expires 10-4-83

Juanita M. Green Notary Public.



DRILLER'S LOG

COMPANY: IREX Corporation

SEC. 9 T. 32S R. 27W

WELL NAME: Bergkamp #1

LOC. SW SE

COUNTY: Meade

RIG NO. #5

TOTAL DEPTH 6000'

ELEVATION

RECEIVED

COMMENCED: 1-13-83

COMPLETED: 1-27-83

FEB 7 1983

CONTRACTOR: Rains & Williamson Oil Co., Inc.

IREX Corp.

CASING RECORD:

SURFACE: 8 5/8" @ 1515' w/550 sx. Lite, 2% cc. and 200 sx. Class H, 3% cc.

PRODUCTION: D&A

LOG

(Figures Indicate Bottom of Formations)

Sand & Redbed	1386
Redbed	2226
Shale & Lime	2476
Lime & Shale	6000
<u>ROTARY TOTAL DEPTH</u>	<u>6000</u>

RECEIVED
STATE CORPORATION COMMISSION

FEB 11 1983

CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas)
COUNTY OF Sedgwick) SS:

I, Wilson Rains, President of Rains & Williamson Oil Co., Inc.
upon oath state that the above and foregoing is a true and correct copy of the log of the
Bergkamp #1 well.

Wilson Rains
Wilson Rains

Subscribed and sworn to before me this 28 day of January, 1983.

My Appointment Expires:
10-4-83

Juanita M. Green
Juanita M. Green

