



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

P.O. Box 17027 3830 S. Meridian
WICHITA, KANSAS 67217

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION
MAR 22 1974
3-22-74
CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Smith of Natural Gas has this

date requested permission to plug the following described well:

Mr. Smith guarantees payment of the plugging fee.

Operator's full Name: Natural Gas Anadarko Inc.

Complete Address: Box 809, Perryton, Texas

Lease Name: Colburn "A" Well No. 1

Location: 420' FSL & 900' FEL SE Sec. 20 Twp. 33 Rge. 32 (E)(W)

County: Seward Total Depth 6005' Oil Well

Gas Well Input Well SWD Well D & A X Lost Hole

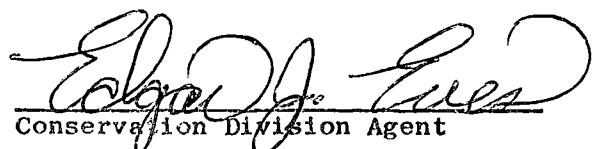
Mr. Smith was instructed to plug the well as follows:

8 5/8" to 1356' circulated w/ cement. Mud 6005' to 1000'

Spot 35 sacks cement 1000' to 900' Mud 900' to 45'

Plug, Halls & 15 sacks cement 45' to 0'.

Very truly yours,


Conservation Division Agent