

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-095-10036-00-01
Spot: N2NWSE Sec/Twnshp/Rge: 9-30S-8W
2310 feet from S Section Line, 1980 feet from E Section Line
Lease Name: EVANS A Well #: 2
County: KINGMAN Total Vertical Depth: 4291 feet

Operator License No.: 34357
Op Name: ATLAS OPERATING LLC
Address: 15603 KUYKENDAHL, STE 200
HOUSTON, TX 77090

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		4234		
PROD	4.5	4288	840	150 SX
SURF	8.625	323		250 SX

Well Type: EOR UIC Docket No: E20245.1 Date/Time to Plug: 11/20/2014 12:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD Company: QUALITY WELL SERVICE Phone:

Proposed Plugging Method: PUMP 35 SXS AND 100 # HULLS ON BOTTOM. 35 SXS @ 3200' HIC. OBSTRUCTION AT 1310'. 35 SXS DISPLACED TO 1000'. 35 SXS @ 840'. CIRC 375' TO 0'.

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL
Date/Time Plugging Completed: 11/24/2014 4:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:
RAN TUBING TO 4200', PUMP 35 SXS CEMENT @100# HULLS. PULL TUBING TO 3200'; PUMP 35 SXS CEMENT. OBSTRUCTION AT 1310'. BULLHEAD 35 SXS DOWN CASING & DISPLACE TO 1000'. CUT CASING AT 840', PUMP 35 SXS CEMENT. PULL CAISNG TO 375' & CIRCUALTE CEMENT TO SURFACE.

Perfs:

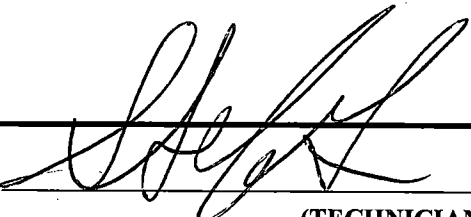
Top	Bot	Thru	Comments
4212	4273	CSG	

RECEIVED
KANSAS CORPORATION COMMISSION

Remarks: QUALITY WELL SERVICE, FAILED MIT
Plugged through: TBG

FEB 02 2015
CONSERVATION DIVISION
WICHITA, KS

District: 02

Signed 
(TECHNICIAN)
CCUIC
CKM 2/14/15

1/2