

15.009-16185-0000

R

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 114-38

LOCATION CNW-SE-NW

SEC. 4 TWP. 16 RGE. 3. W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 4 Lease Michaels "B"


Operator Sumray Oil Corp. Address Box #195 - A. Bend. Kans.

Field _____ County Barton

Total Depth 3387 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 625 ft. Circulated with cement.
5% casing set at 3381 ft. 100 sacks of cement.
Low Wells Plug at 3190 ft. Plugged back to 3130 ft with
Sand & Chat. Washed 3 sacks of cement at 3130 ft.
Shot off & pulled the 5% casing - mud to 250 ft. Set Rock
Bridge & 10 sacks of cement at 250 ft. - mud to 35 ft. Plug
x 10 sacks of cement at the surface -
The West Supply Co. - Plugging Contractors

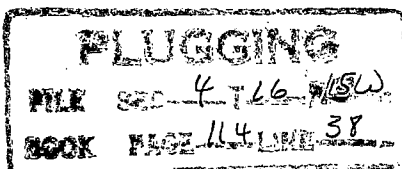

NOV - 2 1951

CONSERVATION DIVISION

Wichita, Kansas
District Conservation Agent

Date 10-31-51