

State of Kansas



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

P.O. Box 17027 3830 S. Meridian
WICHITA, KANSAS 67217

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1974
CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Patrick of Patrick has this

date requested permission to plug the following described well:

Mr. Patrick guarantees payment of the plugging fee.

Operator's full Name: R.J. Patrick

Complete Address: Box 1273, Liberal, Kansas

Lease Name: Salley Well No. 1

Location: C NW Sec. 33 Twp. 33 Rge. 33 (E) (W)

County: Seward Total Depth 6502' Oil Well

Gas Well Input Well SWD Well D & A Lost Hole

Mr. Patrick was instructed to plug the well as follows:

8 5/8" to 1685' circulated w/ cement. 4 1/2" to 6500' cemented

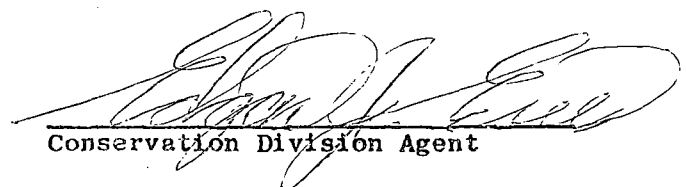
Top perforations 5979' Plug bottom w/ 20 sacks cement.

Top of cement 5850' Mud 5850' to 900'

Spot 35 sacks cement 900' to 800' Mud 800' to 45'

Plug, Hulls & 15 sacks cement 45' to 0'.

Very truly yours,


Conservation Division Agent

~~INVOICED~~

DATE _____

INV. NO. _____