

~~KANSAS~~

Form CP-3
Rev. 6-4-68

STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT'S REPORT

J. Lewis Brock
Administrator
P. O. Box 17027
Wichita, Kansas 67217

RECEIVED
STATE CORPORATION COMMISSION

APR 24 1974

CONSERVATION DIVISION
Wichita, Kansas

Operator's Full Name R.J. Patrick

Complete Address Box 1273, Liberal, Kansas 67901

Lease Name Salley Well No. 1

Location CNW Sec. 33 Twp. 33 Rge. 33 (E) (W)

County Seward Total Depth 6502'

Abandoned Oil Well Gas Well Input Well SWD Well D & A

Other well as hereafter indicated _____

Plugging Contractor Sargent Casing Pulling

Address Box 506, Liberal, Kansas License No. 511

Operation Completed: Hour 5:30PM Day 18 Month 4 Year 1974

The above well was plugged as follows:

8 5/8" to 1685' circulated w/ cement. 4 1/2" to 6500' cemented.

Top perforations 5979' Plug bottom w/ 20 sacks cement.

Top of cement 5850' Mud 5850' to 900'

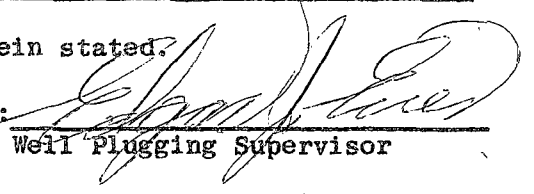
Spotted 35 sacks cement 900' to 800' Mud 800' to 45'

Plug, Halls & 15 sacks cement 45' to 0'. Company Pump

Pulled 2602' of 4 1/2" casing.

I hereby certify that the above well was plugged as herein stated.

INVOICED

Signed: 

Well Plugging Supervisor

DATE 4/26/74

INV. NO. 8988-w