

15-189-21076-00009

GABBERT-JONES, INC.
WICHITA, KAS.

DRILLERS WELL LOG

YOUNGGREN E-3H
2549' FNL & 1320' FEL
Sec. 5-33S-38W
Stevens County, Kansas

COMMENCED: 6-16-87

COMPLETED: 6-20-87

OPERATOR: PAN EASTERN EXPLORATION COMPANY
=====

DEPTH From	To	Formation	Remarks
0	65	Clay	
65	620	Surface clay-sand	Ran 14 jts. of 24# 8 5/8" csg. LD @ 617 w/220 sks. 75/25
620	1195	Redbed	Posmix - 2% CC - 1/4# Floseal
1195	1383	Glorietta Sand	150 sks. Common - 3% CC
1383	1564	Shale	1/4# Floseal
1564	2195	Shale-Lime	PD @ 10:15 AM 6-17-87
2195	2362	Lime	
2362	2600	Shale-Lime	
2600	2828	Lime-Shale	Ran 70 jts. of # 14 5 1/2 "
2828	2860	Lime	csg. LD @ 2859' w/200 sks. class C - 20% DCD - 2% CC
	2860 TD		1/4# Floseal - 40 sks. Class C 10% DCD - 2% CC - 1/4# Floesal PD @ 9:45 PM. 6-20-87

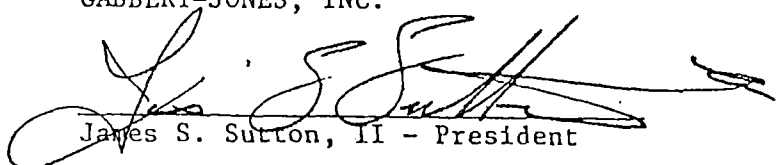
RECEIVED
STATE CORPORATION COMMISSION

JUL 21 1988

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS)
) I, the undersigned, being duly sworn on oath, state that
COUNTY OF SEDGWICK) the above Drillers' Well Log is true and correct
) to the best of my knowledge and belief and according
) to the records of this office.

GABBERT-JONES, INC.


James S. Sutton, II - President

Subscribed & sworn to before me this


Lola Lenore Costa - Notary Public

My Commission expires 11-21-88