

CONFIDENTIAL
ORIGINAL

GABBERT-JONES, INC.
WICHITA, KANSAS

- DRILLERS' WELL LOG -

WELL NAME: YOUNGREN J-2
SEC 4-33S-38W
STEVENS COUNTY, KANSAS

API # 15-189-21779-0000

COMMENCED: 9/17/94
COMPLETED: 9/29/94
OPERATOR: ANADARKO PETROLEUM CORP

R-12

DEPTH		FORMATION	REMARKS
From	To		
0	220	Sand	
220	475	Sand-Gyp-Clay	Ran 41 jts of 24# 8 5/8" csg set @ 1692 w/600 sks Class
475	1165	Redbed-Gyp	H Posmix 4% Gel 2% CC 1/4#
1165	1372	Sand	Flocele 200 sks common
1372	1693	Redbed	2% CC
1693	1870	Anhy-Shale	PD @ 6:15PM 9/18/94
1870	2470	Shale-Lime	
2470	6300	Lime-Shale	

6300' TD

RELEASED

MAR 14 1996

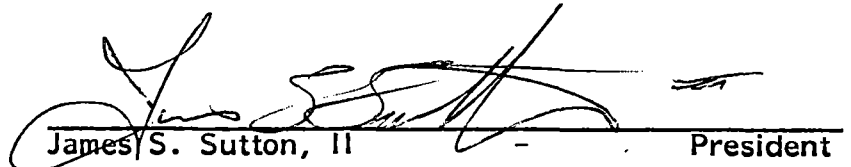
FROM CONFIDENTIAL

Ran 145 jts of 15 1/2# 5 1/2" csg set @ 6275' w/FO Tool @ 3035 Cemented w/50 sks 65/35 Posmix 1/4# Flocele 150 sks Thixset 1/4# Flocele PD @ 10:15PM 9/29/94 RR @ 11:15PM 9/29/94


STATE OF KANSAS]
COUNTY OF SEDGWICK]

I, the undersigned, being sworn on oath, state that the above Drillers' Well log is true and correct to the best of my knowledge and belief and according to the records of this office.

GABBERT-JONES, INC.


James S. Sutton, II President

Subscribed & sworn to before me this 5th day of October, 1994


Shirley A. Pelz, Notary Public
My commission expires:
October 18, 1997

