

KANSAS



STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT'S REPORT

RECEIVED
STATE CORPORATION COMMISSION
APR 11 1972
CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Operator's Full Name Cities Service Oil Co.

Complete Address Box 1098, Liberal, Kansas

Lease Name Novinger Well No. 507

Location NW NE Sec. 26 Twp. 33 Rge. 30 (E) (W)

County Meade Total Depth 5950'

Abandoned Oil Well X Gas Well Input Well SWD Well D & A

Other well as hereafter indicated None

Plugging Contractor Toland & Johnston

Address Oklahoma City, Oklahoma License No. 539

Operation Completed: Hour 6:15PM Day 7 Month 4 Year 1972

The above well was plugged as follows:

13 3/8" to 630' circulated w/ cement. 8 5/8" to 2697' cemented.

5 1/2" to 5910' cemented. Top perforations 5294'

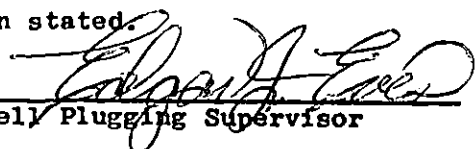
Plug bottom w/ 20 sacks cement. Top of cement 5100'

Mud 5100' to 2000' Spotted 35 sacks cement 2000' to 1900'

Mud 1900' to 45' Plug, Hulls & 15 sacks cement 45' to 0'

Company Pump Pulled 3033' of 5 1/2" casing.

I hereby certify that the above well was plugged as herein stated.

Signed: 
Well Plugging Supervisor

INVOICED

DATE 4/13/72

INV. NO. 5533-W