

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Seward County, Sec. 1 Twp. 33S Rge. 31 (E) (W)

Location as "NE/CNW4SW4" or footage from lines 1250' fr. East, 1390' fr. North

Lease Owner The Hamrock Oil and Gas Corporation

Lease Name Florence E. Anthony "B" Well No. 1

Office Address Box 631, Amarillo, Texas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 9, 19 57

Application for plugging filed June 9, 19 57

Application for plugging approved June 9, 19 57


Plugging commenced June 9, 19 57

Plugging completed June 9, 19 57

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

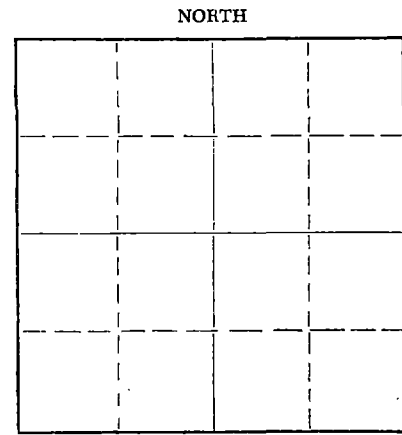

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Merle Rives

Producing formation None Depth to top Bottom Total Depth of Well 5690 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface sand	Water	0	550	9 5/8"	2670'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed 9 5/8" OD Halliburton plug to 650'. Spotted 35 sacks of cement from 650' to 563'. Hole filled with mud. Pushed 9 5/8" Halliburton plug to 35'. Spotted 20 sacks of cement from 35' to surface.

Name of Plugging Contractor Halliburton Oil Well Cementing Company
Address Great Bend, Kansas

STATE OF TEXAS, COUNTY OF POTTER, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. A. C. Lupton

Box 631, Amarillo, Texas (Address)

SUBSCRIBED AND SWORN TO before me this 13th day of June, 19 57

Pauline Powell Notary Public

My commission expires 6-1-59

RECEIVED STATE CORPORATION COMMISSION

JUN 14 1957

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC. 1 T. 33 31 W
BOOK PAGE 19 LINE 32

FLORENCE E. ANTHONY "B" NO. 1
Section 1, Township 33 South, Range 31 West
Seward County, Kansas

0'	-	550'	Limey sand
550'	-	900'	Sand and shale
900'	-	1,190'	Sand and anhydrite
1,190'	-	1,600'	Shale and anhydrite
1,600'	-	1,640'	Sand and shale
1,640'	-	1,800'	Salt and anhydrite
1,800'	-	1,850'	Sand and shale
1,850'	-	2,080'	Shale and anhydrite
2,080'	-	2,500'	Salt and anhydrite
2,500'	-	2,650'	Anhydrite and dolomite
2,650'	-	2,860'	Dolomite
2,860'	-	3,750'	Lime
3,750'	-	4,070'	Lime and shale
4,070'	-	4,170'	Lime
4,170'	-	4,340'	Shale
4,340'	-	4,900'	Lime
4,900'	-	5,615'	Lime and shale
5,615'	-	5,625'	Sand
5,625'	-	5,636'	Shale
5,636'	-	5,690'	Lime

RECEIVED
STATE CORP. COMMISSION

JUN 13 1937

CONSERVATION DIVISION
P.O. BOX 107

PLUGGING	
FILE	SEG <u>1</u> T <u>33</u> S <u>31W</u>
BOOK	PAGE <u>19</u> LINE <u>32</u>