


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Seward County. Sec. 4 Twp. 33S Rge. 31W E/W
Location as "NE/CNW/SW" or footage from lines _____
C NW NW

Lease Owner W.M. Gruenerwald & Ass.
Lease Name Burr Well No. 1
Office Address Box 2437 Colo. Springs, Colo. 80901
Character of Well (Completed as Oil, Gas or Dry Hole) _____
Gas

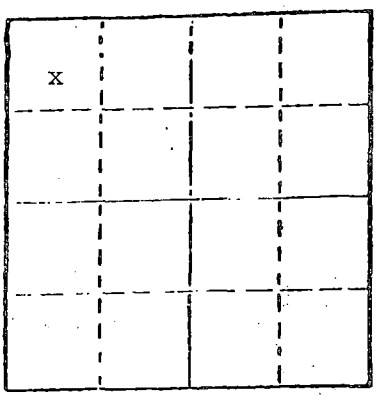

Date Well completed January 19 69
Application for plugging filed _____ 19 _____
Application for plugging approved _____ 19 _____
Plugging commenced 5-15 19 80
Plugging completed 5-20 19 80
Reason for abandonment of well or producing formation _____
uneconomical

If a producing well is abandoned, date of last production _____
February 19 76

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Morrow Depth to top 5612 Bottom 5616 Total Depth of Well 6050
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Morrow	Gas, Trace	5612	5616	8 5/8	1589	none
	of oil			4 1/2	6050	2610

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- Spot 20 sks. of cement @ 5080 to 4900
- Spot 35 sks. of cement @ 1500 to 1400
- Spot 25 sks. of cement @ 750 to 650
- Put 10 sks. of cement @ 40 to 0

RECEIVED
AUG 21 1980
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sargents Casing Pulling Ser. Box 506 Liberal, Kansas 67901

STATE OF Colorado COUNTY OF El Paso, ss.
A.J. Smith (employee of owner) or (~~XXXXXXXXXX~~)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
P.O. Box 909, Colo. Spgs. Colo. 80901
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of August, 19 80

[Signature]
Notary Public.

My commission expires June 12, 1982

15-175-20023-0600

WELL LOG

COMPANY Wm. Gruenerwald & Associates, Inc.

SEC. 4 T. 33S R. 31W

FARM Burr NO. 1


LOC. NW NW

TOTAL DEPTH 6050'

COUNTY Seward

COMM. 11-26-67 COMP. 12-13-67

CONTRACTOR Garvey Drilling Company



CASING 8 5/8" @ 1560' w/860 SX
4 1/2" @ 6050' w/290 SX

ELEVATION

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

- 770' Sand, Clay and Red Bed
- 1554' Red Bed
- 1560' Anhydrite
- 1835' Anhydrite, Red Bed and Shale
- 2325' Shale
- 2756' Shale and Lime
- 3230' Lime and Shale
- 3460' Shale and Lime
- 3815' Shale, Lime and Chalk
- 3867' Lime and Shale
- 3882' Lime
- 4190' Lime and Shale
- 4450' Lime
- 4573' Lime and Shale
- 5345' Lime
- 5393' Lime and Shale
- 5490' Lime
- 5640' Lime and Shale
- 6050' Lime
- 6050' RTD

RECEIVED
STATE CORPORATION COMMISSION
MAR 26 1968
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas
County of Barton } ss

I, Sam N. Stephens of Garvey Drilling Company

upon oath state the above and foregoing is a true and correct copy of the log of the Burr No. 1 well.

Sam N. Stephens

Subscribed and sworn to before me this 27th day of December 19 67

My Commission Expires: November 5th, 1969

Richard A. Days
NOTARY PUBLIC